


# OCTRA NEO+ INVERTER

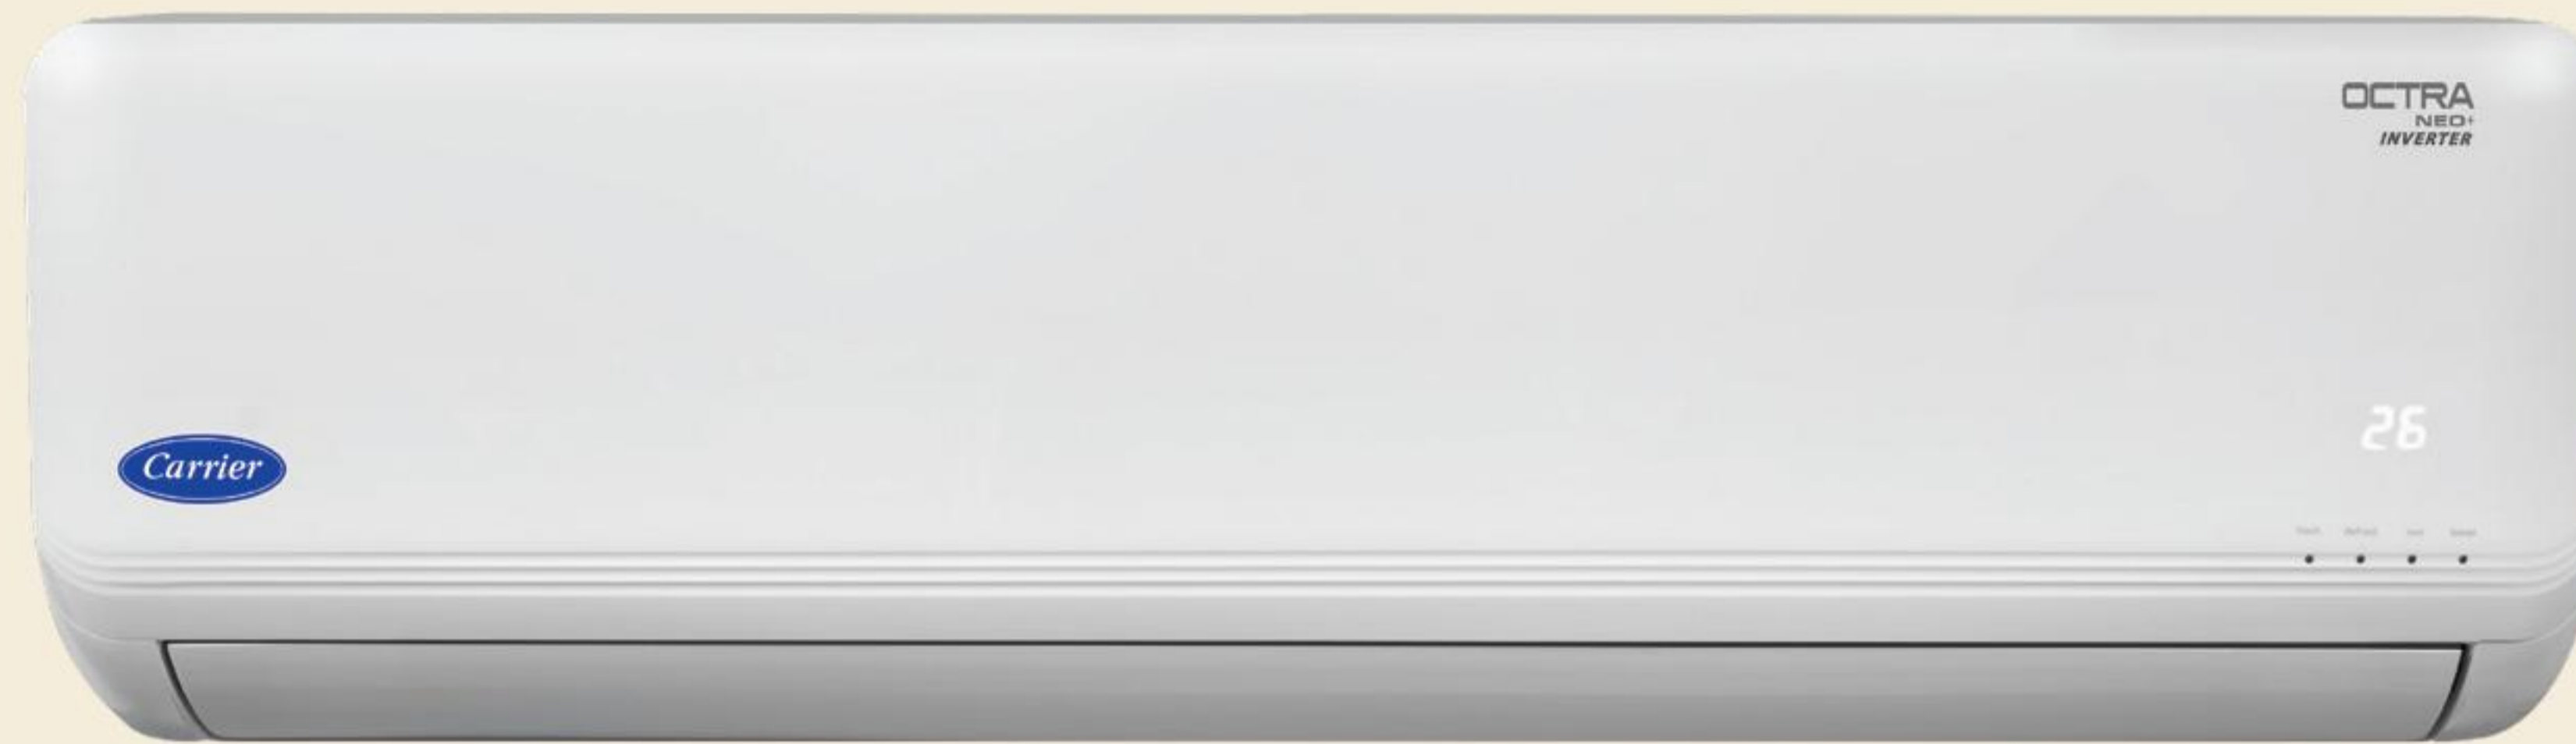

## FEATURES

- |   |                                    |  |  |   |   |
|---|------------------------------------|--|--|---|---|
|   |                                    |  |  |   |   |
| HIDDEN DISPLAY  | AUTO ON<br>TIMER                   | AUTO OFF<br>TIMER  | AUTO MODE                              | AUTO<br>RESTART   | AUTO SWING  |
|   |                                    |  |  |   |   |
| AUTO CLEANSER   | AUTO FAN<br>SPEED                  | SLEEP MODE   | DRY MODE                               | FOLLOW ME   | MY MODE<br>(Favourite Mode)                                   |
|   |                                    |  |  |   |   |
| REFRIGERANT<br>LEAKAGE<br>DETECTOR  | INTELLIGENT<br>CRF ALERT           | LOUVER POSITION<br>MEMORY  | TEMP DISPLAY<br>ON/OFF                 | SECURITY<br>LOCK  | LCD<br>REMOTE   |
|   |                                    |  |  |   |   |
| REMOTE<br>BACKLIT   | ELECTROSTATIC<br>DUST FILTER       | PM 2.5<br>MICRON FILTER<br>(3M Brand)  | HYPER<br>PROTECTIVE<br>FILTERS         | AIR DIRECTION<br>CONTROL  | HIGH AMBIENT<br>WORKING<br>(Powerful cooling<br>even at 52°C) |
|   |                                    |  |  |   |   |
| STABILIZER FREE<br>OPERATION<br>(Works efficiently<br>between 150-280V<br>even at 48°C) | DURABLE<br>INVERTER<br>OUTDOOR PCB | LOW VOLTAGE<br>OPERATION<br>(Works<br>uninterruptedly<br>even at low voltage<br>of 195V) | FLEXI COOL<br>(50%, 75%, 100%<br>Mode) | ECO FUNCTION<br>(24°C set<br>temperature as per<br>BEE requirement) |   |

R32



Available in 1 TR, 1.5 TR & 2.0 TR