



BUILT FOR YOUR COMFORT

Catalogue 2023

**Rest
Assured**



THE INVENTOR

In 1902, Willis Carrier solved one of mankind's most elusive challenges by controlling the indoor environment through modern air conditioning.

His invention enabled countless industries, promoting global productivity, health, and personal comfort.

For more than a century, our research, expertise, and forethought have resulted in market-leading innovations.

Carrier has been present in India since 1986.

It was established to fulfil the growing demand of room air conditioners. Carrier Midea India has a manufacturing facility in Supa, Maharashtra which strives to bring state-of-the-art technology that has been localised for the Indian consumer.



INDIA'S OWN. INDIA'S FAVOURITE.

Since 2012, Carrier has won the hearts of our customers through advanced product solutions with global technology built in India. Our manufacturing facility, located in Maharashtra, is responsible for creating the world-class quality products that our patrons love and trust, all while utilising state-of-the-art energy-saving technological practices. We continuously strive to keep our products up-to-date, staying ahead of the curve in today's ever-changing tech landscape. Our main objective is to bring next-gen technology to every Indian household.




AT CARRIER, WE SAY:



We believe that with Carrier,
you don't have to worry about
anything. We are confident that we
deliver exceptional quality products
and the finest of services with them,
and that is why you can trust us.
From the moment you have a Carrier
product installed in your home,
through time that product becomes
a reliable feature in your household.
This is why our motto is
"Rest Assured".




CHANGE CAPACITY* AS PER YOUR
COOLING NEEDS/WEATHER

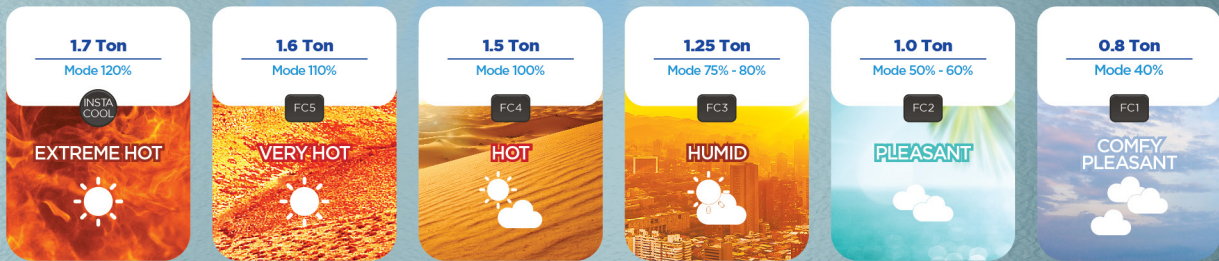


6-IN-1 AC WITH FLEXI COOL HYBRIDJET TECHNOLOGY

We believe that technology must adapt to human requirements and not the other way around. That's why Carrier ACs come with Flexicool technology. It means that apart from adjusting the AC's cooling performance you can also change the energy consumption of the AC as per your requirement.

HERE ARE 6 COOLING CAPACITY ADJUSTMENTS



Disclaimer: The product shown here is INDUS Dxi 18K-5i model.

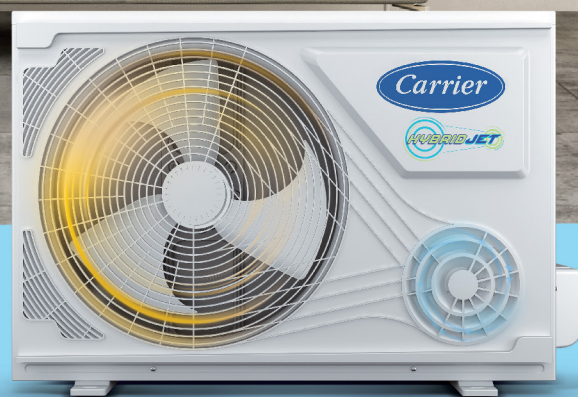

The revolutionary HYBRIDJET technology in Carrier ACs not only keeps you cool, but itself too. Using a combination of air and low-temperature refrigerant, Carrier HYBRIDJET ACs keep their outdoor E-box cooler, no matter how hot it gets outside. When other ACs can't function properly over temperatures of 50°C, Carrier HYBRIDJET AC keeps on functioning efficiently even at a temperature of 55°C.



**HIGH AMBIENT
WORKING**



**DURABLE INVERTER
OUTDOOR PCB**



**LOW VOLTAGE
OPERATION**



**STABILIZER-FREE
OPERATION**




Disclaimer: Also available in HYBRIDJET ALPHA variant, now.



SMART ENERGY DISPLAY

Keeping you up-to-date on your usage, Carrier ACs come with a Kilowatt display that shows you how much power your AC is consuming in real time.

Just like your car keeps on updating you of its mileage, a Carrier AC comes with a Kilowatt display panel, that keeps on showing the Kilowatts your AC is consuming.




CARRIER SMART CONNECT

A dynamic and proactive approach for enhanced equipment and system management, Carrier Smart Connect enables greater connectivity between the air conditioner, our service support team, and you. Equipped with WiFi connectivity, it is compatible with your Google Home and Alexa Home devices. You can also know the real-time status of the AC by connecting with customer care, using the app, if any error occurs.



CARRIER
SMART CONNECT

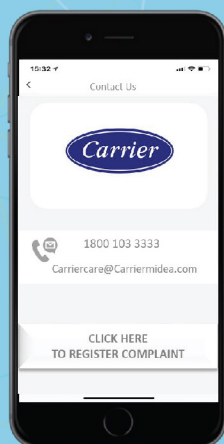


SELF
DIAGNOSIS



CUSTOMER
SUPPORT


HOW TO REGISTER A COMPLAINT ON CARRIER SMART CONNECT IN CASE OF AN ERROR:

STEP 1



Register your AC
on the Carrier
Wi-Fi-CMI app.

STEP 2




Tap on 'Me' and
tap on 'Contact Us'.

STEP 3




Tap On 'Click Here
To Register
Complaint'.

STEP 4



Fill in the details of
your complaint and
send them.

NOTIFICATION



You will get a
notification on the
status of your
complaint.



Scan the below QR code to
download the Carrier WiFi app



Android



iOS

EXPLORE THE 2023 RANGE OF CARRIER ACs





INVERTER ACs

Experience a stunning cooling experience that saves on energy.









Indus DXi Smart 4 & 5 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR

**DESIGNED IN INDIA.
MADE IN INDIA.**



ADDITIONAL FEATURES

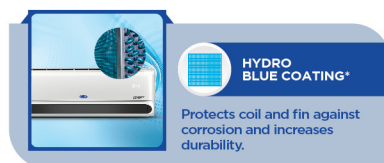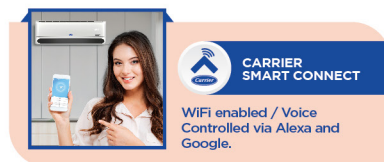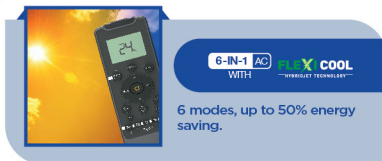

CAI12IN5R33W0



CAI18IN5R32W0



CAI24IN5R32W0



CAI24IN4R32W0

	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500 / 1750	5280 / 2640	6000 / 3000	6200 / 3100
	Power Input - Full / Half (W)	840 / 334	1310 / 480	1500 / 555	1695 / 643
	Annual Power Consumption (kWh)	536.2	799.71	920.55	1054.45
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.11	5.05	4.55
Comfort & Convenience	Air Flow (CFM)	380	685	700	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/38	46/44/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	Yes	Yes	Yes	Yes
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	275x80x18.8	32.4x96.5x23.4	32x104.6x24	32x104.6x24
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





Indus Dxi

3 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR



DESIGNED IN INDIA.
MADE IN INDIA.



FLEXI COOL
HYBRIDJET TECHNOLOGY



ADDITIONAL FEATURES

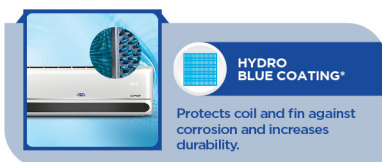

HIDDEN DISPLAY



AIR DIRECTIONAL CONTROL



HIGH AIR FLOW
CFM - 700*



BACKLIT REMOTE



AUTO ON / OFF
TIMER



DOUBLE DRAIN




STABILIZER
FREE EVEN
AT 48 DEG*



AUTO SWING



DRY MODE



HYDRO
CORROSION
COATING (BLUE)



CA112IN3R33FO



CA118IN3R32FO



CA124IN3R32FO

Tonnage Category		1.0 TR	1.5 TR	2.0 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	5200/2600	6300/3150
	Power Input - Full / Half (W)	1055/455	1660/645	2000/765
	Annual Power Consumption (kWh)	704.46	1046.3	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.88	3.85	3.9
Comfort & Convenience	Air Flow (CFM)	400	685	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/39
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	Yes	Yes	Yes
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	28.2x79.8x19.2	32.4x96.5x23.4	32x104.6x24
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333




Carrier



EMPERIA DXi Wifi 5 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR




**DESIGNED IN INDIA.
MADE IN INDIA.**



FLEXI COOL
HYBRIDJET TECHNOLOGY



ADDITIONAL FEATURES

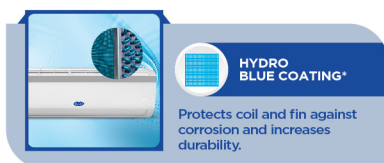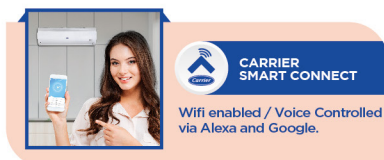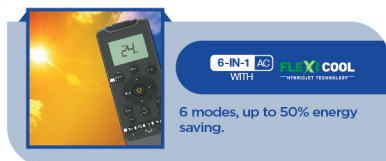

CAI12EN5R32W0



CAI12EN5R33W0



CAI18EN5R32W0



CAI24EN5R32W0

	Tonnage Category	1 TR	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3550 / 1775	3500 / 1750	5000 / 2500	6000 / 3000
	Power Input - Full / Half (W)	860 / 337	840 / 334	1260 / 445	1500 / 555
	Annual Power Consumption (kWh)	544.58	536.2	754.05	920.55
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.05	5.13	5.05
Comfort & Convenience	Air Flow (CFM)	380	380	580	700
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	44/42/38	46/44/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	27.5x80x18.8	27.5x94x20.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333



Carrier/01-23



EMPERIA DXi Wifi 4 Star Inverter Series

Available Variants : 2 TR

DESIGNED IN INDIA.
MADE IN INDIA.




ADDITIONAL FEATURES



6-IN-1 AC WITH FLEXI COOL

6 modes, up to 50% energy saving.



PM 2.5 FILTER


Gives cleaner and pure air.



HIDDEN DISPLAY



AIR DIRECTIONAL CONTROL



REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.



CARRIER SMART CONNECT


WiFi enabled / Voice Controlled via Alexa and Google.



AUTO CLEANER



100% COPPER



HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

* Patented technology



HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.



FOLLOW ME



HIGH AIR FLOW CFM - 700*



INSTA COOL

Instant cooling with a single click.



Scan the QR code to download the Carrier WiFi app.



BACKLIT REMOTE




AUTO ON / OFF TIMER



AUTO SWING



STABILIZER FREE EVEN AT 48 DEG*



AQUA CLEAR PROTECTION



DOUBLE DRAIN



CAI24EN4R32W0

Tonnage Category		2 TR
Performance	Cooling Capacity - Full / Half (W)	6200 / 3100
	Power Input - Full / Half (W)	1695 / 643
	Annual Power Consumption (kWh)	1054.45
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	4.55
Comfort & Convenience	Air Flow (CFM)	700
	IDU Noise (H/M/L) in db	46/44/38
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	315x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	70x84.5x33.5
Valve Size	Inch	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





EMPERIA DXi 3 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR

DESIGNED IN INDIA.
MADE IN INDIA.

4-in-1
FlexiCool
Remote



FLEXI COOL
HYBRIDJET TECHNOLOGY



ADDITIONAL FEATURES

4-IN-1 AC WITH FLEXI COOL
4 modes, up to 50% energy saving.

PM 2.5 FILTER
Gives cleaner and pure air.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

TURBO MODE
Brings down the temperature rapidly.

HYBRID JET TECHNOLOGY*
Works in high temperature up to 55°C.
* Patented technology

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.

FOLLOW ME
Quicker and targeted cooling around remote.

AUTO CLEANSER
Disinfects and cleans the indoor unit.



HIDDEN DISPLAY



AIR DIRECTIONAL CONTROL



AUTO RESTART



100% COPPER



DOUBLE DRAIN



HIGH AIR FLOW CFM - 700*



BACKLIT REMOTE



AUTO ON / OFF TIMER



AUTO SWING



STABILIZER FREE EVEN AT 48 DEG*



AQUA CLEAR PROTECTION



DRY MODE



CA112EN3R32F0



CA112EN3R33F0



CA118EN3R32F0



CA124EN3R32F0

Tonnage Category		1 TR	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500 / 1750	3530 / 1765	5050 / 2525	6300 / 3150
	Power Input - Full / Half (W)	1055 / 455	1055 / 455	1590 / 615	2000 / 765
	Annual Power Consumption (kWh)	704.46	704.46	999.69	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.85	3.88	3.91	3.9
Comfort & Convenience	Air Flow (CFM)	375	375	580	700
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	42/40/37	46/44/39
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (H x W x D) in cm	275x80x18.8	275x80x18.8	275x94x20.5	315x104.5x23.5
	Outdoor (H x W x D - with Grill) in cm	54x78x26.5	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





EMPERIA LXI

4 & 5 Star Inverter Series


Available Variants : 1 TR, 1.5 TR & 2 TR



ADDITIONAL FEATURES



6-in-1
WITH FLEXI COOL
INVERTER TECHNOLOGY
6 modes, up to 50% energy saving.




PM 2.5 FILTER
Gives cleaner and pure air.



HIDDEN
DISPLAY



AIR
DIRECTIONAL
CONTROL



REFRIGERANT
LEAKAGE DETECTOR
Smart system detects and
safeguards the AC.



HYBRID JET ALPHA
TECHNOLOGY*
Works in high temperature
up to 55°C.



HIGH AIR FLOW
CFM - 700*



DRY MODE



AUTO ON / OFF
TIMER



BACKLIT
REMOTE



HYDRO
BLUE COATING*
Protects coil & fin against
corrosion and increases
durability.



INTELLIGENT
CRF ALERT
Notifies you to clean filters.



STABILIZER
FREE EVEN
AT 48 DEG*




DOUBLE
DRAIN



FOLLOW ME
Quicker and targeted cooling
around remote.



AUTO
CLEANSER
Disinfects and cleans the
indoor unit.



AQUA CLEAR
PROTECTION



AUTO
SWING



CAI12EL5R33F0



CAI18EL5R32F0



CAI24EL5R32F0



CAI24EL4R33F0

Tonnage Category		1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000	6200/3100
	Power Input - Full / Half (W)	840/334	1260/445	1500/555	1695/643
	Annual Power Consumption (kWh)	536.2	754.05	920.55	1054.45
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	5.05	5.13	5.05	4.55
Comfort & Convenience	Air Flow (CFM)	380	580	700	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/38	46/44/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	275x80x18.8	275x94x20.5	31.5x104.5x23.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

*T&C Apply, 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





EMPERIA LXI 3 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR

4-in-1
FlexiCool
Remote




FLEXI COOL
INVERTER TECHNOLOGY



ADDITIONAL FEATURES

4 modes, up to 50% energy saving.

PM 2.5 FILTER
Gives cleaner and pure air.



HIDDEN
DISPLAY



AIR
DIRECTIONAL
CONTROL

REFRIGERANT
LEAKAGE DETECTOR
Smart system detects and
safeguards the AC.

HYBRID JET ALPHA
TECHNOLOGY*
Works in high temperature
up to 55°C.



HIGH AIR FLOW
CFM - 700*



FOLLOW
ME



AUTO ON / OFF
TIMER



BACKLIT
REMOTE

HYDRO
BLUE COATING*
Protects coil and fin against
corrosion and increases
durability.

INTELLIGENT
CRF ALERT
Notifies you to clean filters.



STABILIZER
FREE EVEN
AT 48 DEG*



DOUBLE
DRAIN

TURBO MODE
Brings down the temperature
rapidly.

AUTO
CLEANSER
Disinfects and cleans the
indoor unit.



AQUA CLEAR
PROTECTION



AUTO
SWING



100%
COPPER



DRY MODE



CAI12EL3R32F0



CAI12EL3R33F0



CAI18EL3R32F0



CAI24EL3R32F0


	Tonnage Category	1 TR	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity- Full / Half (W)	3500/1750	3530/1765	5050/2525	6300/3150
	Power Input- Full / Half (W)	1055/455	1055/455	1590/615	2000/765
	Annual Power Consumption (kWh)	704.46	704.46	999.69	1249.82
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.85	3.88	3.91	3.9
Comfort & Convenience	Air Flow (CFM)	375	375	580	700
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	42/40/37	46/44/39
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code /	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	27.5x80x18.8	27.5x94x20.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"





SUPERIA XTREME 5 Star Inverter Series

Available Variants : 2 TR



ADDITIONAL FEATURES



CAI24SX5R32W0

Tonnage Category		2 TR
Performance	Cooling Capacity - Full / Half (W)	6580 / 3290
	Power Input - Full / Half (W)	1676 / 595
	Annual Power Consumption (kWh)	1005.81
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.06
Comfort & Convenience	Air Flow (CFM)	860
	IDU Noise (H/M/L) in db	46/44/38
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	33.5x108x22.6
	Outdoor (HxWxD-with Grill) in cm	70x84.5x32
Valve Size	Inch	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 860 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333



Carrier



DURAWHITE DXi 5 Star Inverter Series


Available Variants : 1 TR, 1.5 TR & 2 TR

6-in-1
FlexiCool
Remote



FLEXICOOL
INVERTER TECHNOLOGY

ADDITIONAL FEATURES

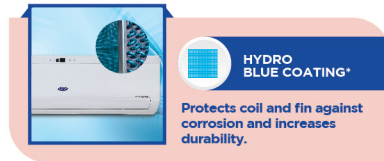

LED 7
SEGMENT
DISPLAY



AIR
DIRECTIONAL
CONTROL



HIGH AIR FLOW
CFM - 700*



BACKLIT
REMOTE



AUTO ON / OFF
TIMER



DOUBLE
DRAIN



STABILIZER
FREE EVEN
AT 48 DEG*



AUTO
SWING



AQUA CLEAR
PROTECTION



100%
COPPER



CAI12DH5R33FO



CAI18DH5R33FO



CAI24DH5R33FO

	Tonnage Category	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000
	Power Input - Full / Half (W)	840/334	1260/445	1500/555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	5.05	5.13	5.05
Comfort & Convenience	Air Flow (CFM)	380	580	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/38
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code /	Yes, LED Display	Yes, LED Display	Yes, LED Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA	NA	NA
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	27.5x94x20.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333

Rest
Assured



DURAWHITE DXi 4 Star Inverter Series

Available Variants : 2 TR

6-in-1
FlexiCool
Remote



FLEXI COOL
INVERTER TECHNOLOGY

ADDITIONAL FEATURES



6-IN-1 AC
WITH FLEXI COOL
INVERTER TECHNOLOGY
6 modes, up to 50% energy saving.



HYDRO
BLUE COATING*
Protects coil and fin against corrosion and increases durability.



REFRIGERANT
LEAKAGE DETECTOR
Smart system detects and safeguards the AC.



INTELLIGENT
CRF ALERT
Notifies you to clean filters.



HIGH AMBIENT
WORKING
Works in high temperature up to 52°C.



PM 2.5 FILTER
Gives cleaner and pure air.



AUTO
CLEANSER
Disinfects and cleans the indoor unit.



FOLLOW ME
Quicker and targeted cooling around remote.



LED 7
SEGMENT
DISPLAY



AIR
DIRECTIONAL
CONTROL



HIGH AIR FLOW
CFM - 700*



BACKLIT
REMOTE



AUTO ON / OFF
TIMER




DOUBLE
DRAIN



STABILIZER
FREE EVEN
AT 48 DEG*



AUTO
SWING



AQUA CLEAR
PROTECTION



100%
COPPER



CAI24DH4R33FO

Tonnage Category		2 TR
Performance	Cooling Capacity - Full / Half (W)	6200/3100
	Power Input - Full / Half (W)	1695/643
	Annual Power Consumption (kWh)	1054.45
	Label Period	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	4.55
Comfort & Convenience	Air Flow (CFM)	700
	IDU Noise (H/M/L) in db	46/44/38
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code /	Yes, LED Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	70x84.5x33.5
Valve Size	Inch	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only.
Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333



Carrier



DURAWHITE DXi 3 Star Inverter Series


Available Variants : 2 TR

4-in-1
FlexiCool
Remote



FLEXI COOL
INVERTER TECHNOLOGY

ADDITIONAL FEATURES

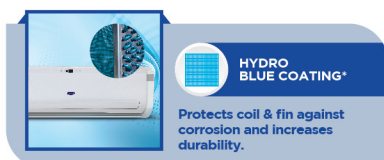

LED 7
SEGMENT
DISPLAY



AIR
DIRECTIONAL
CONTROL



BACKLIT
REMOTE



100%
COPPER



AUTO
SWING




INTELLIGENT
CRF ALERT



HIGH AIR FLOW
CFM - 700*



AUTO ON / OFF
TIMER



AQUA CLEAR
PROTECTION



STABILIZER
FREE EVEN
AT 48 DEG*



CAI24DH3R32FO

	Tonnage Category	2 TR
Performance	Cooling Capacity - Full / Half (W)	6300/3150
	Power Input - Full / Half (W)	2000/765
	Annual Power Consumption (kWh)	1249.82
	Label Period	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.9
Comfort & Convenience	Air Flow (CFM)	700
	IDU Noise (H/M/L) in db	46/44/39
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code / SED) Anti - Viral Guard*	Yes, LED Display
Air Purification & Filters	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x79x28
Valve Size	Inch	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com | Carrier Care: 1800 103 3333

Rest
Assured



DURAWHITE PRO+ RXi 3 Star Inverter Series

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES

4-in-1 AC WITH FLEXICOOL INVERTER TECHNOLOGY

4 modes, up to 50% energy saving.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

PM 2.5 FILTER

Gives cleaner and pure air.

FOLLOW ME

Quicker and targeted cooling around remote.

HIGH AIR FLOW CFM - 450

For 1.5 TR

HIDDEN DISPLAY

DRY MODE

AUTO ON / OFF TIMER

STABILIZER FREE EVEN AT 48 DEG*

AQUA CLEAR PROTECTION

AIR DIRECTIONAL CONTROL

BACKLIT REMOTE

DOUBLE DRAIN

AUTO SWING

100% COPPER



	Tonnage Category	1 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.88	3.85
Comfort & Convenience	Air Flow (CFM)	400	450
	IDU Noise (H/M/L) in db	40/38/32	40/38/32
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code /	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	27x85x22
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333





OCTRA RXi 3 Star Inverter Series

Available Variants : 1 TR & 1.5 TR

4-in-1
FlexiCool
Remote



FLEXI COOL
INVERTER TECHNOLOGY

ADDITIONAL FEATURES

FEATURES

4-IN-1 AC WITH FLEXI COOL
4 modes, up to 50% energy saving.

TURBO MODE
Brings down the temperature rapidly.

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases.


INTELLIGENT CRF ALERT
Notifies you to clean filters.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

FOLLOW ME
Quicker and targeted cooling around remote.

AUTO CLEANSER
Disinfects and cleans the indoor unit.

AIR DIRECTIONAL CONTROL



HIDDEN DISPLAY



DRY MODE



HIGH AIR FLOW
CFM - 450



BACKLIT REMOTE



AUTO ON / OFF
TIMER



DOUBLE DRAIN



STABILIZER
FREE EVEN AT 48 DEG*



AUTO SWING



AQUA CLEAR
PROTECTION



100%
COPPER



CAI12OC3R33FO



CAI18OC3R33FO



CAI18OC3R33FO
with optional 4 way swing

	Tonnage Category	1 TR	1.5 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580	1575/580
	Annual Power Consumption (kWh)	704.46	964.1	964.1
	Label Period	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024
	ISEER Value (W/W)	3.88	3.85	3.85
Comfort & Convenience	Air Flow (CFM)	400	450	450
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	40/38/32
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	27x85x22	27x85x22
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.





KURVE RXi 3 Star Inverter Series

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES FEATURES



HIDDEN DISPLAY



BACKLIT REMOTE



AUTO ON / OFF
TIMER




DOUBLE DRAIN



STABILIZER
FREE EVEN
AT 48 DEG*



AUTO
SWING



AQUA CLEAR
PROTECTION



100%
COPPER



HIGH AIR FLOW
CFM - 450



DRY MODE



CAI12KU3R33F0



CAI18KU3R33F0

	Tonnage Category	1 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024
	ISEER Value (W/W)	3.88	3.85
Comfort & Convenience	Air Flow (CFM)	400	450
	IDU Noise (H/M/L) in db	40/38/32	40/38/32
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	27x85x22
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com | Carrier Care: 1800 103 3333







NOVELLO 365

3 Star HOT & COLD AC

Available Variants : 1.5 TR

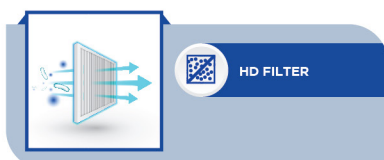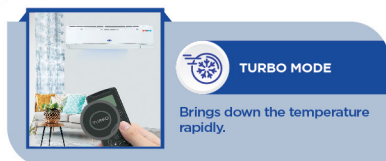

ADDITIONAL FEATURES



HIDDEN
DISPLAY



AIR
DIRECTIONAL
CONTROL



AUTO
SWING



SLEEP
MODE



DOUBLE
DRAIN



DRY MODE




LOUVER
POSITION
MEMORY



AUTO ON / OFF
TIMER



STABILIZER
FREE EVEN
AT 48 DEG*



AQUA CLEAR
PROTECTION



CAI18NO3R32HO

	Tonnage Category	1.5 TR
Performance	Cooling/Heating Capacity - Full/Half (W)	5300 / 2650
	Cooling/Heating Power Input - Full/Half (W)	1583 / 580
	Annual Power Consumption (kWh)	966.34
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	4.25
Comfort & Convenience	Air Flow (CFM)	630
	IDU Noise (H/M/L) in db	49/46/43
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code)	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	29.5x100x23
	Outdoor (HxWxD-with Grill) in cm	59.4x81x30
Valve Size	Inch	1/2" x 1/4"

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333





FIXED SPEED ACs

Built to cool for long, while lasting longer.



Carrier



Indus DX 2 & 3 Star Fixed Speed


Available Variants : 1 TR, 1.5 TR & 2 TR



ADDITIONAL FEATURES



HIGH AMBIENT WORKING
Works in high temperature up to 52°C.



ANTI-VIRAL GUARD*
Protects against air borne viruses, bacteria and germs.



REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.



TURBO MODE
Brings down the temperature rapidly.



AUTO CLEANSER
Disinfects and cleans the indoor unit.



FOLLOW ME
Quicker and targeted cooling around remote.



HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.



INTELLIGENT CRF ALERT
Notifies you to clean filters.



HIDDEN DISPLAY



AIR DIRECTIONAL CONTROL



AUTO RESTART



100% COPPER



BACKLIT REMOTE



HIGH AIR FLOW CFM - 700*




AUTO SWING



AUTO ON / OFF TIMER



DOUBLE DRAIN



AQUA CLEAR PROTECTION



CAS12IN3R32F1



CAS18IN3R32F0



CAS24IN3R32F0



CAS24IN2R32F0

	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity (W)	3600	5230	6050	6000
	Power Input (W)	940	1360	1570	1665
	Annual Power Consumption (kWh)	727.66	1052.79	1215.35	1288.89
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.83	3.85	3.85	3.6
Comfort & Convenience	Air Flow (CFM)	400	700	700	700
	IDU Noise (H/M/L) in db	40/38/35	44/42/38	46/44/40	46/44/40
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	Yes	Yes	Yes	Yes
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	32.4x96.5x22.8	31.5x104.5x23.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply, 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333






EMPERIA DX

2 & 3 Star Fixed Speed

Available Variants : 1 TR, 1.5 TR & 2 TR




ADDITIONAL FEATURES

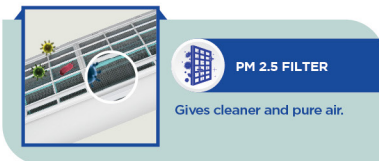

HIDDEN
DISPLAY



AIR
DIRECTIONAL
CONTROL

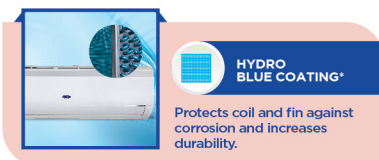

AUTO
RESTART



100%
COPPER



DRY MODE




HIGH AIR FLOW
CFM - 700*



AUTO
SWING



AUTO ON / OFF
TIMER



AQUA CLEAR
PROTECTION



DOUBLE
DRAIN



CAS12EN3R32F1



CAS18EN3R32F0



CAS24EN3R32F0



CAS24EN2R32F0

	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity (W)	3600	5200	6050	6000
	Power Input (W)	940	1350	1570	1665
	Annual Power Consumption (kWh)	727.66	1045.04	1215.35	1288.89
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.83	3.85	3.85	3.6
Comfort & Convenience	Air Flow (CFM)	400	700	700	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/40	46/44/40
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	275x80x18.8	324x96.5x22.8	315x104.5x23.5	315x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply, 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333






DURAWHITE DX 2 & 3 Star Fixed Speed

Available Variants : 2 TR



ADDITIONAL FEATURES

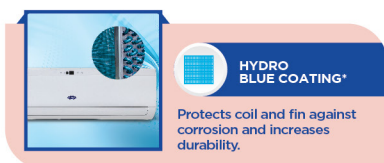

LED 7 SEGMENT DISPLAY



AIR DIRECTIONAL CONTROL



HIGH AIR FLOW CFM - 700*



BACKLIT REMOTE



AUTO ON / OFF TIMER



DOUBLE DRAIN



AUTO RESTART



AUTO SWING



AQUA CLEAR PROTECTION



100% COPPER



CAS24DH3R33FO



CAS24DH2R33FO

	Tonnage Category	2 TR	2 TR
Performance	Cooling Capacity (W)	6050	6000
	Power Input (W)	1570	1665
	Annual Power Consumption (kWh)	1215.35	1288.89
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.85	3.6
Comfort & Convenience	Air Flow (CFM)	700	700
	IDU Noise (H/M/L) in db	46/44/40	46/44/40
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code / SED)	Yes, LED Display	Yes, LED Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	31.5x104.5x23.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	5/8" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





DURAWHITE PRO+ DX 2 & 3 Star Fixed Speed

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



TURBO MODE

Brings down the temperature rapidly.




HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.



HIGH AIR FLOW CFM - 700*

For 1.5 TR



AIR DIRECTIONAL CONTROL




HIDDEN DISPLAY



100% COPPER




AUTO RESTART



AQUA CLEAR PROTECTION



AUTO SWING



AUTO ON / OFF TIMER



DOUBLE DRAIN



DRY MODE



CAS12DP3R32F1



CAS18DP3R32F0



CAS12DP2R33F0



CAS18DP2R33F0

Tonnage Category		1 TR	1.5 TR	1 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5200	3400	5000
	Power Input (W)	940	1350	958	1410
	Annual Power Consumption (kWh)	727.66	1045.04	741.59	1091.49
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.83	3.85	3.55	3.55
Comfort & Convenience	Air Flow (CFM)	400	700	400	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38	39/35/32	44/42/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	32x95x24	27x85x22	32x95x24
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





OCTRA DX 3 Star Fixed Speed

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES



HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



TURBO MODE

Brings down the temperature rapidly.



HIGH AIR FLOW CFM - 700*

For 1.5 TR



AIR DIRECTIONAL CONTROL



HIDDEN DISPLAY



AUTO ON / OFF
TIMER



DOUBLE
DRAIN



AUTO
RESTART



AUTO
SWING



AQUA CLEAR
PROTECTION



100%
COPPER



CAS12OC3R33F0



CAS18OC3R33F0



CAS18OC3R33F0
with optional 4 way swing

	Tonnage Category	1 TR	1.5 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5200	5200
	Power Input (W)	940	1350	1350
	Annual Power Consumption (kWh)	727.66	1045.04	1045.04
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.83	3.85	3.85
Comfort & Convenience	Air Flow (CFM)	400	700	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38	44/42/38
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	32x95x24	32x95x24
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





OCTRA DX 2 Star Fixed Speed

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES



HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



AUTO ON / OFF
TIMER



DOUBLE
DRAIN



TURBO MODE

Brings down the temperature rapidly.



HIGH AIR FLOW CFM - 700*

For 1.5 TR



AUTO
RESTART



AUTO
SWING



AIR DIRECTIONAL CONTROL



HIDDEN DISPLAY



AQUA CLEAR
PROTECTION



100%
COPPER



CAS12OC2R33F0



CAS18OC2R33F0

Tonnage Category		1 TR	1.5 TR
Performance	Cooling Capacity (W)	3400	5000
	Power Input (W)	958	1410
	Annual Power Consumption (kWh)	741.59	1091.49
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.55	3.55
Comfort & Convenience	Air Flow (CFM)	400	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	32x95x24
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333

Rest
Assured



KURVE DX

2 & 3 Star Fixed Speed

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES



HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.



AIR DIRECTIONAL CONTROL



AUTO ON / OFF
TIMER



DOUBLE
DRAIN



HIDDEN DISPLAY



HIGH AMBIENT WORKING

Works in high temperature
up to 52°C.



AUTO
RESTART



AUTO
SWING




HIGH AIR FLOW CFM - 700*

For 1.5 TR



TURBO MODE

Brings down the temperature
rapidly.



AQUA CLEAR
PROTECTION



100%
COPPER



CAS12KU3R33FO



CAS18KU3R33FO



CAS12KU2R33FO



CAS18KU2R33FO

		CAS12KU3R33FO		CAS18KU3R33FO		CAS12KU2R33FO		CAS18KU2R33FO	
Performance	Tonnage Category	1 TR	1.5 TR	1 TR	1.5 TR	1 TR	1.5 TR	1 TR	1.5 TR
	Cooling Capacity (W)	3600	5200	3400	5000	3400	5000	3400	5000
	Power Input (W)	940	1350	958	1410	958	1410	958	1410
	Annual Power Consumption (kWh)	727.66	1045.04	741.59	1091.49	741.59	1091.49	741.59	1091.49
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
Comfort & Convenience	ISEER Value (W/W)	3.83	3.85	3.55	3.55	3.55	3.55	3.55	3.55
	Air Flow (CFM)	400	700	400	700	400	700	400	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38	39/35/32	44/42/38	39/35/32	44/42/38	39/35/32	44/42/38
	Fan motor (no. of speeds)	4	4	4	4	4	4	4	4
Air Purification & Filters	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
	Anti - Viral Guard*	NA	NA	NA	NA	NA	NA	NA	NA
Dimensions	HD Filter	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Indoor (HxWxD) in cm	27x85x22	32x95x24	27x85x22	32x95x24	27x85x22	32x95x24	27x85x22	32x95x24
Valve Size	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28	54x79x28	54x79x28	54x79x28	54x79x28	54x79x28
	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333



WINDOW ACs

State-of-the-art cooling that puts you at ease.






ESTRELLA DXi 5 Star Inverter Series

Available Variants : 1.5 TR



ADDITIONAL FEATURES




HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.



TEMPERATURE DISPLAY



AIR DIRECTIONAL CONTROL



TURBO MODE

Brings down the temperature rapidly.



ENERGY SAVER MODE


Right temperature at low power bill.



AUTO RESTART




AUTO SWING



AQUA CLEAR PROTECTION



100% COPPER



DUST FILTER

High-efficient cooling and assured durability.



SLEEP MODE

Automatically switches off the unit after 7 hours.



CIW18EC5R32F0

	Tonnage Category	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5150/2575
	Power Input - Full / Half (W)	1640/730
	Annual Power Consumption (kWh)	1114.62
	Label Period	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.58
	Air Flow (CFM)	480
Comfort & Convenience	IDU Noise (H/M/L)	56/53/50
	Fan Motor (no. of speeds)	3
	IDU Display (Temp / ER Code)	Yes
Air Purification & Filters	Dust Filter	Yes
	Overall (HxWxD) in cm	43x66x77

Carrier/101-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





ESTRELLA DXi (E)
5 Star Inverter Series
Available Variants : 1.5 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.

TURBO MODE

Brings down the temperature rapidly.

ENERGY SAVER MODE

Right temperature at low power bill.

DUST FILTER

High-efficient cooling and assured durability.

SLEEP MODE

Automatically switches off the unit after 7 hours.

TEMPERATURE DISPLAY

AIR DIRECTIONAL CONTROL

AUTO RESTART

AUTO SWING

AQUA CLEAR PROTECTION

100% COPPER



Tonnage Category		1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5070/2535
	Power Input - Full / Half (W)	1620/725
	Annual Power Consumption (kWh)	1104.37
	Label Period	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.55
	Air Flow (CFM)	450
Comfort & Convenience	IDU Noise (H/M/L)	56/53/50
	Fan Motor (no. of speeds)	3
	IDU Display (Temp / ER Code)	Yes
Air Purification & Filters	Dust Filter	Yes
	Overall (HxWxD) in cm	43x66x70

Carrier/101-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.





ESTRELLA DX 5 Star Fixed Speed

Available Variants : 1.5 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING
Works in high temperature up to 50°C.


HYDRO BLUE COATING*
Protects fin against corrosion and increases durability.

TURBO MODE
Brings down the temperature rapidly.

ENERGY SAVER MODE
Right temperature at low power bill.

DUST FILTER
High-efficient cooling and assured durability.

AIR DIRECTIONAL CONTROL



TEMPERATURE
DISPLAY




AUTO
SWING



AUTO
RESTART



SLEEP MODE



AQUA CLEAR
PROTECTION



100%
COPPER



CAW18EC5R32F0

	Tonnage Category	1.5 TR
Performance	Cooling Capacity (W)	5050
	Power Input (W)	1400
	Annual Power Consumption (kWh)	1083.75
	Label Period	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.61
	Air Flow (CFM)	500
Comfort & Convenience	IDU Noise (H/M/L)	60/59/58
	Fan Motor (no. of speeds)	3
	IDU Display (Temp / ER Code)	Yes
Air Purification & Filters	Dust Filter	Yes
	Overall (HxWxD) in cm	43x66x77

Carrier/101-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





ESTRELLA DX

2 & 3 Star Fixed Speed

Available Variants : 1 TR, 1.5 TR & 2 TR




HIGH AMBIENT WORKING
Works in high temperature up to 50°C.




HYDRO BLUE COATING*
Protects fin against corrosion and increases durability.



TURBO MODE
Brings down the temperature rapidly.



ENERGY SAVER MODE
Right temperature at low power bill.




DUST FILTER
High-efficient cooling and assured durability.



AIR DIRECTIONAL CONTROL

ADDITIONAL FEATURES



TEMPERATURE DISPLAY




AUTO SWING



AUTO RESTART



SLEEP MODE



AQUA CLEAR PROTECTION



100% COPPER



CAW12EC3R32FO



CAW18EC3R32FO



CAW24EC3R32FO



CAW24EC2R32FO

	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity (W)	3600	5000	6000	6000
	Power Input (W)	1125	1558	1875	1942
	Annual Power Consumption (kWh)	870.87	1206.06	1451.45	1503.32
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.2	3.21	3.2	3.09
	Air Flow (CFM)	450	500	650	650
Comfort & Convenience	IDU Noise (H/M/L)	54/53/52	56/54/52	60/59/58	59/58/57
	Fan Motor (no. of speeds)	3	3	3	3
	IDU Display (Temp / ER Code)	Yes	Yes	Yes	Yes
Air Purification & Filters	Dust Filter	Yes	Yes	Yes	Yes
	Overall (HxWxD) in cm	43x66x70	43x66x70	43x66x77	43x66x77

Carrier/01/23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333






CONTROL YOUR AC WITH THE CARRIER COOL CONNECT APP

You can now control your Carrier ACs on your phone with just a tap. The Cool Connect App allows you to get complete access to your air conditioner through the app itself. Everything from every detail of your product, services, e-store, product catalogues and videos, all in one place.

Scan the below QR code to
download the Carrier Wi-Fi app



REASONS TO BUY CARRIER ROOM AIR CONDITIONERS



6-IN-1 AC

WITH

FLEXICOOL
—HYBRIDJET TECHNOLOGY—



**SMART ENERGY
DISPLAY**



**ANTI-VIRAL
GUARD***



**CARRIER
SMART CONNECT**



**INSTA
KOOL**



**HIGH AMBIENT
WORKING
(AT 55° C)**



**HIDDEN
DISPLAY**



**AUTO
SWING**



**INTELLIGENT
CRF ALERT**




**REFRIGERANT
LEAKAGE DETECTOR**



**STABILIZER FREE
EVEN AT 48 DEG***



**HYDRO
BLUE COATING***



**AQUA CLEAR
PROTECTION**



**AUTO
CLEANSER**



**34 FEET
AIR FLOW***



**AIR DIRECTIONAL
CONTROL**



FOLLOW ME



MY MODE



**100%
COPPER**



**EQUIPPED WITH
5 SAFETY SENSORS**



**ERROR CODE
INDICATOR**



* Terms and Conditions apply. Product specifications, features, and offers are subject to change without prior notice.

** The features may vary depending upon the models.

* Complete 5 years warranty* worth ₹18,000* (1 year Standard warranty + 4 Year extended warranty) on the complete unit of Carrier Inverter Split Room Air Conditioners. Limited Period Offer.

** Comprehensive 5 years warranty* worth ₹10,000* (1 year Standard warranty + 4 Year extended warranty) on the complete unit of Carrier Fixed Speed Split Room Air Conditioners. Limited Period Offer.

For detailed terms and conditions & validity period, please visit www.carriermideaindia.com


**Rest
Assured**




Media Arena



Quick guides

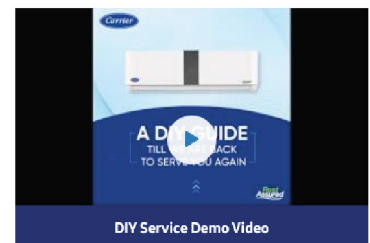

Expert reviews

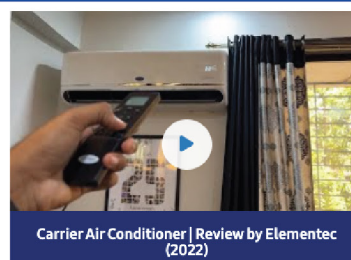

Voice of the people





Corporate Office:

CARRIER MIDEA INDIA PRIVATE LIMITED

1st Floor, Pearl Tower, Plot No - 51, Sector - 32, Gurgaon, Haryana - 122001

Factory:

CARRIER MIDEA INDIA

Plot No. A-5, SUPA-PARNER Industrial Area, Ahmednagar, Maharashtra, 414301

CARRIER CARE - 1800 103 3333

Follow us on:



<https://www.facebook.com/CarrierMideaAc>



<https://www.instagram.com/carriermideaindia>



<https://www.twitter.com/CarrierMideaInd>

Disclaimer: As a continuing policy of product innovation at Carrier, the design and specifications are subject to change without prior notice.

The visuals of the products in the brochure are representative only, actual products might differ from the ones shown.

'Products mentioned in this brochure comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of their useful life'. For more details kindly visit our website carriermideaindia.com or contact Carrier care: 1800 103 3333