


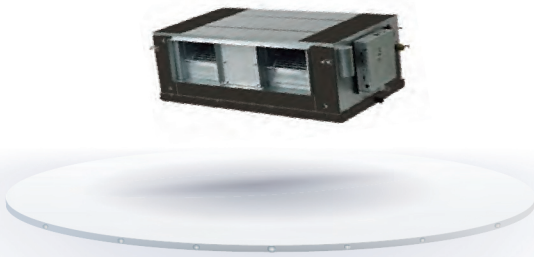


High Static Pressure

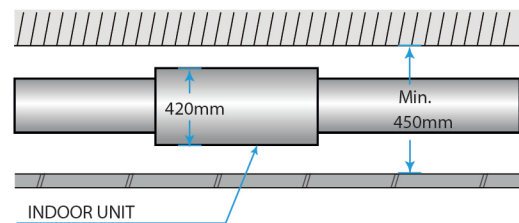


Flexible Duct Design >>

The High Static Pressure Duct indoor unit offers external static pressures of up to 196Pa (models 71 to 160) or 280Pa (models 200 to 560), allowing air supply duct lengths of up to 14m at a height of 6.5m. With a height of just 420mm (models 71 to 160), only 450mm of ceiling space is required.

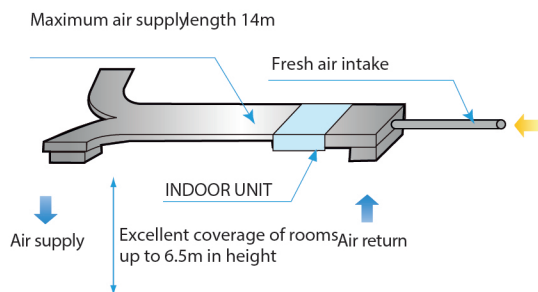


Double-skin Drainage Pan >>

A double-skin drainage pan provides double protection for ceilings (models 71 to 160 and models 400 to 560)

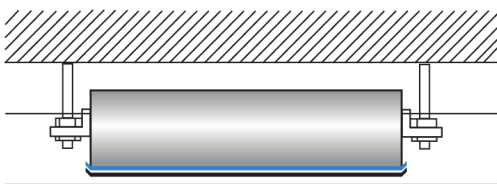

Drain Pump >>

A drain pump with a 750mm pump head is available as a customization option (models 71 to 160).

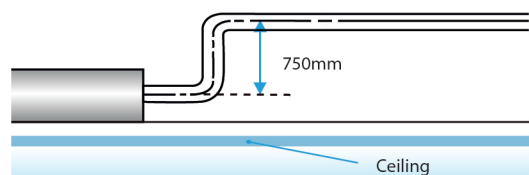

Easy Installation >>

Flanges for air inlet/outlet ducts are fitted as standard on the High Static Pressure Duct. On models 70 to 160, the expansion valve is fitted inside the unit, requiring no extra connection.

Easy Maintenance Access, Flexible Control >>

The wired remote controller is provided as standard and the wireless remote controller is available as a customization option. Functional ports including remote on/off dry contact are included as standard, providing additional control flexibility. For ease of installation, the electric control box's display board is factory-fitted and the filter can be accessed either from the rear of from below.

Specification

Model			MDV-D71T1/N1-B	MDV-D80T1/N1-B	MDV-D90T1/N1-B	MDV-D112T1/N1-B	MDV-D140T1/N1-B	MDV-D160T1/N1-B
Power supply			1-phase,220-240V,50Hz					
Capacity	Cooling	kW	7.1	8.0	9.0	11.2	14.0	16.0
	Heating	kW	8.0	9.0	10.0	12.5	16.0	17.0
Power input	Cooling	W	263	263	423	524	724	940
	Heating	W	263	263	423	524	724	940
Airflow rate(H/M/L)		m ³ /h	1443/1361/1218	1416/1338/1220	1951/1741/1518	2116/1936/1520	3000/2618/2226	3620/3044/2744
External static pressure(Min/Std/Max)		Pa	25/25/196	37/37/196	37/37/196	50/50/196	50/50/196	50/50/196
Sound pressure level(H/M/L)		dB(A)	48/46/44	48/46/44.5	52/49/47	52/49/47	53/50/48	54/52/50
Net dimension(W×H×D)		mm	952×420×690	952×420×690	952×420×690	952×420×690	1300×420×690	1300×420×690
Packing dimension(W×H×D)		mm	1090×440×768	1090×440×768	1090×440×768	1090×440×768	1436×450×768	1436×450×768
Net/gross weight		kg	45/50	45/50	46.5/52.4	50.6/56	68/70	70/77.5
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wired controller					

Model			MDV-D200T1/N1-B	MDV-D250T1/N1-B	MDV-D280T1/N1-B	MDV-D400T1/N1	MDV-D450T1/N1	MDV-D560T1/N1
Power supply			1-phase,220-240V,50Hz					
Capacity	Cooling	kW	20.0	25.0	28.0	40.0	45.0	56.0
	Heating	kW	22.5	26.0	31.5	45.0	50.0	63.0
Power input	Cooling	W	1516	1516	1516	2700	2700	3400
	Heating	W	1516	1516	1516	2700	2700	3400
Airflow rate(H/M/L)		m ³ /h	4700/4100/3599	4700/4100/3599	4700/4100/3599	7472/6072/4995	7472/6072/4995	9550/7950/6600
External static pressure(Min/Std/Max)		Pa	50/200/280	50/200/280	50/200/280	50/200/280	50/200/280	50/200/280
Sound pressure level(H/M/L)		dB(A)	59/55/52	59/55/52	59/55/52	61/59/56	61/59/56	63/60/57
Net dimension(W×H×D)		mm	1440×505×925	1440×505×925	1440×505×925	1970×668×902.5	1970×668×902.5	1970×668×902.5
Packing dimension(W×H×D)		mm	1509×550×990	1509×550×990	1509×550×990	2095×800×964	2095×800×964	2095×800×964
Net/gross weight		kg	115/129	115/129	115/129	232/245	232/245	235/250
Piping connections	Liquid/gas pipe	mm	Φ9.53×2/Φ15.9×2	Φ9.53×2/Φ15.9×2	Φ9.53×2/Φ15.9×2	Φ9.53×2/Φ22.2×2	Φ9.53×2/Φ22.2×2	Φ9.53×2/Φ22.2×2
	Drain pipe	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard controller			Wired controller					

Notes:

1. Nominal capacities are based on the following conditions:

- Cooling: indoor temperature 27°C (80.6°F) DB, 19°C (66.2°F) WB; outdoor temperature 35°C (95.0°F) DB; equivalent refrigerant piping length 7.5m (24.6ft) with zero level difference.
- Heating: indoor temperature 20°C (68.0°F) DB; outdoor temperature 7°C (44.6°F) DB, 6°C (42.8°F) WB; equivalent refrigerant piping length 7.5m (24.6ft) with zero level difference.

2. Sound pressure level is measured 1.4m (4.59ft) below the unit in a semi-anechoic chamber.

3. External static pressure is based on high speed indoor airflow.

4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

