Carrier

THE NEXT LEVEL OF INNOVATION

ROOM AIR CONDITIONER CATALOGUE / 2024

Rest Assured

Carrier

INDIA'S OWN.
INDIA'S FAVOURITE.

Carrier

Since 2012, Carrier has won the hearts of customers through advanced product solutions with global technology built in India. Manufacturing facility, located in Maharashtra, is responsible for creating the world-class quality products that our patrons love and trust, all while utilising state-of-the-art energy-saving technological practices. We continuously strive to keep our products up-to-date, while staying ahead of the curve in today's ever-changing tech landscape. Our main objective is to bring next-gen technology to every Indian household.

AT CARRIER, WE SAY Rest Assured

We believe that with Carrier, you don't have to worry about anything. We are confident that we deliver exceptional quality products and the finest of services with them, and that is why you can trust us.
From the moment you have a Carrier product installed in your home, through time that product becomes a reliable feature in your household.

This is why our motto is **"Rest Assured"**.

CARRIER SMART CONNECT

A dynamic and proactive approach for enhanced equipment and system management, Carrier Smart Connect enables greater connectivity between the air conditioner, our service support team, and you. Equipped with Wi-Fi connectivity, it is compatible with your Google Home and Alexa Home devices. You can also know the real-time status of the AC by connecting with customer care, using the app, if any error occurs.

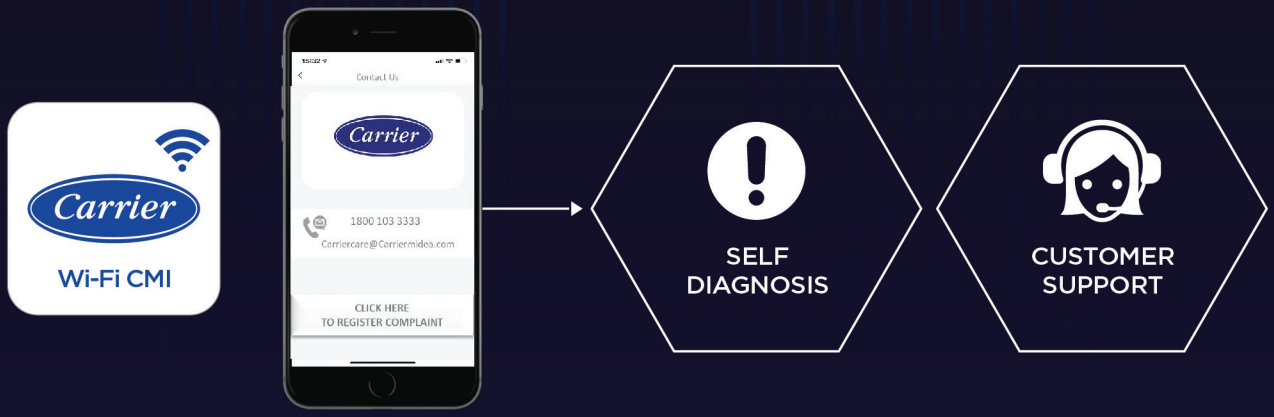

HOW TO REGISTER A COMPLAINT ON CARRIER SMART CONNECT IN CASE OF AN ERROR:

STEP 1



Register your AC on the Carrier Wi-Fi-CMI app.

STEP 2



Tap on 'Me' and tap on 'Contact Us'.

STEP 3

Tap On 'Click Here To Register Complaint'.

STEP 4



Fill in the details of your complaint and send them.

NOTIFICATION



You will get a notification on the status of your complaint.

Carrier
Wi-Fi CMI

Scan the below QR code to download the Carrier Wi-Fi app

Android iOS

*T&C Apply.

CHANGE CAPACITY* AS PER YOUR COOLING NEEDS/WEATHER

Carrier
INSTA COOL
EXTREME HOT
1.7 Ton
Mode 120%

Carrier
FC5
VERY HOT
1.6 Ton
Mode 110%

Carrier
FC4
HOT
1.5 Ton
Mode 100%

Carrier
FC3
HUMID
1.25 Ton
Mode 75% - 80%

Carrier
FC2
PLEASANT
1.0 Ton
Mode 50% - 60%

Carrier
FC1
COMFY PLEASANT
0.8 Ton
Mode 40%

Disclaimer: Modes of 1.5 TR model *T&C Apply

Carrier

6-IN-1 AC WITH FLEXI COOL

HYBRIDJET TECHNOLOGY

We believe that technology must adapt to human requirements and not the other way around. That's why Carrier ACs come with Flexicool technology. It means that apart from adjusting the AC's cooling performance you can also change the energy consumption of the AC as per your requirement.

HERE ARE 6 COOLING CAPACITY ADJUSTMENTS

INSTA COOL

FC5

FC4

FC3

FC2

FC1

Disclaimer: The product shown here is INDUS Dxi 18K-5i model.

Carrier

INVERTER
ACs

Carrier

NEW LAUNCH
— LATEST TECH —

XCEL SERIES

EXCELLENT IN COOLING, EXCEPTIONAL IN TECH.

6-IN-1 AC WITH FLEXI COOL
INVERTER TECHNOLOGY

Wi-Fi

HYBRID JET

0.8 KW
SMART ENERGY DISPLAY

INDIA'S FIRST X-LINE LED DESIGN
REGISTERED UNDER INTELLECTUAL PROPERTY INDIA 398592-001

Available in* 1TR/1.5TR/2TR 1TR/1.5TR/2TR

Variant available Xcel Edge (without LED)

Disclaimer: Wi-Fi is available in 5 star inverter.

*T&C Apply

Carrier Care: 1800 103 3333

Rest Assured

XCEL LUMO Exi Wifi

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

0.8 KW SMART ENERGY DISPLAY

Wi-Fi

JUST ASK alexa

works with the Google Assistant

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

0.8 KW SMART ENERGY DISPLAY

Shows real power consumption.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INSTA COOL

Instant cooling with a single click.

CARRIER SMART CONNECT

Wi-Fi enabled / Voice controlled via Alexa and Google.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Air Directional Control
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- High Air Flow CFM – 700*
- Auto On/Off Timer
- Backlit Remote
- Follow Me

		CAI12CL5R34W0	CAI18CL5R34W0	CAI24CL5R34W0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6580
	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000
	Power Input - Full / Half (W)	840/334	1260/445	1500/555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only.
Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

XCEL LUMO Exi

3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

0.8 KW SMART ENERGY DISPLAY

6-IN-1 AC WITH FLEXI COOL

6 modes, up to 50% energy saving.

0.8 KW SMART ENERGY DISPLAY

Shows real power consumption.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INSTA COOL

Instant cooling with a single click.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Air Directional Control
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- High Air Flow CFM – 700*
- Auto On/Off Timer
- Backlit Remote
- Follow Me

		CAI12CL3R34F0	CAI18CL3R34F0	CAI24CL3R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5050/2525	6300/3150
	Power Input - Full / Half (W)	1055/443	1590/615	2000/765
	Annual Power Consumption (kWh)	694.06	999.69	1249.82
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.85	3.91	3.9
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

XCEL EDGE Exi Wifi

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

0.8 KW SMART ENERGY DISPLAY

Wi-Fi

JUST ASK alexa

works with the Google Assistant

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

0.8 KW SMART ENERGY DISPLAY

Shows real power consumption.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INSTA COOL

Instant cooling with a single click.

CARRIER SMART CONNECT

Wi-Fi enabled / Voice controlled via Alexa and Google.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Air Directional Control
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- High Air Flow CFM – 700*
- Auto On/Off Timer
- Backlit Remote
- Follow Me

		CAI12CE5R34W0/4F0	CAI18CE5R34W0/4F0	CAI24CE5R34W0/4F0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6580
	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000
	Power Input - Full / Half (W)	840/334	1260/445	1500/555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only.
Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

XCEL EDGE Exi

3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

0.8 KW SMART ENERGY DISPLAY

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

0.8 KW SMART ENERGY DISPLAY

Shows real power consumption.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INSTA COOL

Instant cooling with a single click.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Air Directional Control
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- High Air Flow CFM – 700*
- Auto On/Off Timer
- Backlit Remote
- Follow Me

		CAI12CE3R34F0	CAI18CE3R34F0	CAI24CE3R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5050/2525	6300/3150
	Power Input - Full / Half (W)	1055/443	1590/615	2000/765
	Annual Power Consumption (kWh)	694.06	999.69	1249.82
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.85	3.91	3.9
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

Carrier

NEW LAUNCH
LATEST TECH

POWERFUL COOLING WITH CUTTING-EDGE TECHNOLOGY

XTREME SERIES

XTREME COOLING
Peak performance 5910W*

XTREME AIRFLOW
1000mm platform for instant cooling

X-LINE LED
India's first AC with futuristic LED light

INDIA'S FIRST X-LINE LED DESIGN
REGISTERED UNDER INTELLECTUAL PROPERTY INDIA 382679-001

Available in#
1TR / 1.5 TR
1.5 TR

Variant available:
Xtreme Edge (without LED)

Carrier Care: 1800 103 3333

*T&C Apply

*Maximum cooling capacity of 18K-5 star inverter

Rest Assured

XTREME LUMO EXI

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

AUTO CLEANSER

Disinfects and cleans the indoor unit.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

INSTA COOL

Instant cooling with a single click.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

- High Air Flow CFM - 700*
- Auto On/Off Timer
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- Hidden Display
- Backlit Remote
- Air Directional Control
- Follow Me

		CAI12XL5R33F0	CAI18XL5R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5910
	Cooling Capacity - Full / Half (W)	3450/1725	5200/2600
	Power Input - Full / Half (W)	850/323	1290/475
	Annual Power Consumption (kWh)	529.28	789.6
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	5.05	5.1
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4

Carrier/01-24

*T&C Apply. 695 CFM only applicable on 1 TR & 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

XTREME LUMO EXI

3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

AUTO CLEANSER

Disinfects and cleans the indoor unit.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

INSTA COOL

Instant cooling with a single click.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

- High Air Flow CFM - 700*
- Auto On/Off Timer
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- Hidden Display
- Backlit Remote
- Air Directional Control
- Follow Me

		CAI12XL3R34F0	CAI18XL3R34F0	CAI24XL3R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5150/2575	6300/3150
	Power Input - Full / Half (W)	1065/430	1610/650	2000/765
	Annual Power Consumption (kWh)	685.59	1036.39	1249.82
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.9	3.85	3.9
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 715 CFM only applicable on 1.5 TR & 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

XTREME EDGE EXI

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

AUTO CLEANSER

Disinfects and cleans the indoor unit.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

INSTA COOL

Instant cooling with a single click.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

- High Air Flow CFM – 700*
- Auto On/Off Timer
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- Hidden Display
- Backlit Remote
- Air Directional Control
- Follow Me

		CAI12XE5R33F0	CAI18XE5R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5910
	Cooling Capacity - Full / Half (W)	3450/1725	5200/2600
	Power Input - Full / Half (W)	850/323	1290/475
	Annual Power Consumption (kWh)	529.28	789.6
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	5.05	5.1
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4

Carrier/01-24

*T&C Apply. 695 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

XTREME EDGE EXI

3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote

R32

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

HYBRID JET

AUTO CLEANSER

Disinfects and cleans the indoor unit.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

INSTA COOL

Instant cooling with a single click.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

- High Air Flow CFM - 700*
- Auto On/Off Timer
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- Hidden Display
- Backlit Remote
- Air Directional Control
- Follow Me

		CAI12XE3R34F0	CAI18XE3R34F0	CAI24XE3R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5150/2575	6300/3150
	Power Input - Full / Half (W)	1065/430	1610/650	2000/765
	Annual Power Consumption (kWh)	685.59	1036.39	1249.82
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.9	3.85	3.9
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 715 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

Indus EXi Smart

5 Star Inverter Series

Available Variants | 1 TR, 1.5 TR & 2 TR

INDIA DESIGN MARK awarded in 2021

DESIGNED IN INDIA.
MADE IN INDIA.

6-in-1 FlexiCool Remote

FLEXI COOL HYBRIDJET TECHNOLOGY

HYBRIDJET

R32

Wi-Fi

JUST ASK alexa

works with the Google Assistant

0.8 KW
SMART ENERGY DISPLAY

6-IN-1 AC WITH FLEXI COOL HYBRIDJET TECHNOLOGY

6 modes, up to 50% energy saving.

0.8 KW SMART ENERGY DISPLAY

Shows real power consumption.

INSTA COOL

Instant cooling with a single click.

ANTI-VIRAL GUARD*

Protects against air borne viruses, bacteria, and germs.

CARRIER SMART CONNECT

Wi-Fi enabled / Voice controlled via Alexa and Google.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Air Directional Control
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- High Air Flow CFM – 700*
- Auto On/Off Timer
- Backlit Remote
- Follow Me

		CAI12IN5R34W0	CAI18IN5R34W0	CAI24IN5R34W0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5910	6580
	Cooling Capacity - Full / Half (W)	3500/1750	5230/2615	6000/3000
	Power Input - Full / Half (W)	840/334	1290/475	1500/555
	Annual Power Consumption (kWh)	536.2	789.6	920.55
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

Indus EXi
3 Star Inverter Series

Available Variants | 1 TR, 1.5 TR & 2 TR

INDIA DESIGN MARK awarded in 2021

DESIGNED IN INDIA.
MADE IN INDIA.

6-in-1 FlexiCool Remote

R32

0.8 KW
SMART ENERGY DISPLAY

FLEXI COOL
HYBRIDJET TECHNOLOGY

HYBRIDJET

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

0.8 KW SMART ENERGY DISPLAY

Shows real power consumption.

ANTI-VIRAL GUARD*

Protects against air borne viruses, bacteria, and germs.

CARRIER SMART CONNECT

Wi-Fi enabled / Voice controlled via Alexa and Google.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Air Directional Control
- Auto Restart
- Stabilizer Free Even At 48 Degrees*
- Refrigerant Leakage Detector
- High Air Flow CFM – 700*
- Auto On/Off Timer
- Backlit Remote
- Follow Me

		CAI12IN3R34F0	CAI18IN3R34F0	CAI24IN3R32F0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5050 / 2525	6300 / 3150
	Power Input - Full / Half (W)	1055/443	1590 / 615	2000 / 765
	Annual Power Consumption (kWh)	694.06	999.69	1249.82
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.85	3.91	3.9
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

OCTRA EXi

3 Star Inverter Series

Available Variants | 1 TR & 1.5 TR

FLEXI COOL
INVERTER TECHNOLOGY

R32

6-in-1 FlexiCool Remote

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INTELLIGENT CRF ALERT

Notifies you to clean filters.



REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.

FOLLOW ME

Quicker and targeted cooling around remote.

AIR DIRECTIONAL CONTROL

Precisely direct airflow for optimal cooling distribution.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Dry Mode
- Backlit Remote
- Auto Swing
- Double Drain
- High Air Flow CFM – 450*
- Auto On/Off Timer

		CAI12OC3R34F0	CAI18OC3R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5350
	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.88	3.85
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4

Carrier/01-24

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement. #4Way swing Option also available in octra series.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

KURVE EXi

3 Star Inverter Series

Available Variants | 1 TR & 1.5 TR

6-in-1 FlexiCool Remote

R32

FLEXI COOL
INVERTER TECHNOLOGY

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.



REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.

HD FILTER

Gives cleaner and pure air.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

FOLLOW ME

Quicker and targeted cooling around remote.

AIR DIRECTIONAL CONTROL

Precisely direct airflow for optimal cooling distribution.

- Hidden Display
- Dry Mode
- Auto Restart
- Auto Swing
- Double Drain
- High Air Flow CFM – 450*
- Auto On/Off Timer
- Stabilizer Free Even At 48 Degrees*

		CAI12KU3R34F0	CAI18KU3R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5350
	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.88	3.85
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4

Carrier/01-24

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement. #4Way swing Option also available in Kurve series.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

Indus HOT & COLD

3 Star Inverter Series

Available Variant | 1.5 TR

6-IN-1 AC WITH FLEXI COOL HYBRIDJET TECHNOLOGY

R32

HYBRIDJET

ANTI-VIRAL GUARD*

Protects against air borne viruses, bacteria, and germs.

SLEEP MODE

Automatically switches off the unit after 7 hours.

INSTA COOL

Instant cooling with a single click.

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

0.8 KW

SMART ENERGY DISPLAY

Shows real power consumption.

-10°C 50°C

HEATING & COOLING

Hot & Cold airflow for all your comfort

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.

*Patented technology

- Hidden Display
- Air Directional Control
- Auto Restart
- Backlit Remote
- Refrigerant Leakage Detector
- Stabilizer Free Even At 48 Degrees*
- Auto On/Off Timer
- Follow Me

MORE STARS MORE SAVINGS

CAI18IN3R33H0

	TONNAGE CATEGORY	1.5 TR
Performance	Cooling Capacity Max (W)	5760
	Cooling Capacity - Full / Half (W)	5100/2550
	Heating Capacity (W)	5000
	Power Input - Full / Half (W)	1540/618
	Annual Power Consumption (kWh)	988.04
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	4
	Valve Size (Inch)	1/2 x 1/4

*T&C Apply. 685 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.
Working range : 0deg C to 55deg C in Indus H&C

Carrier/01-24

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

NOVELLO 365

3 Star HOT & COLD AC

Available Variants | 1.5 TR

R32

TURBO MODE

Brings down the temperature rapidly.

HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

-10°C 50°C

HEATING & COOLING

Hot & Cold airflow for all your comfort

HIGH AIRTHROW 630 CFM

Precisely direct airflow for optimal cooling distribution.

SLEEP MODE

Automatically switches off the unit after 7 hours.



HD FILTER

Quicker and targeted cooling around remote.

Auto Swing

Dry Mode

Air Directional Control

Sleep Mode

Double Drain

Louver Position Memory

Auto On/Off Timer

Stabilizer Free Even At 48 Degrees*

CAI18NO3R32H0

	TONNAGE CATEGORY	1.5 TR
Performance	Cooling Capacity Max (W)	5910
	Cooling Capacity - Full / Half (W)	5300/2650
	Heating Capacity (W)	5300/2650
	Power Input - Full / Half (W)	1583/580
	Annual Power Consumption (kWh)	966.34
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	4.25
	Valve Size (Inch)	1/2 x 1/4

Carrier/01-24

*T&C Apply. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement. Working range : -10deg C to 52deg C in Novello H&C

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

DURAWHITE EXi

5 Star Inverter Series

Available Variants | 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote

R32

FLEXI COOL
INVERTER TECHNOLOGY

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.

REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.

PM 2.5 FILTER

Gives cleaner and pure air.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

FOLLOW ME

Quicker and targeted cooling around remote.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

- LED 7 Segment Display
- Air Directional Control
- Auto On/Off Timer
- High Air Flow CFM – 700*
- Auto Swing
- Stabilizer Free Even At 48 Degrees*
- Double Drain
- Backlit Remote

		CAI12DH5R34F0	CAI18DH5R34F0	CAI24DH5R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6580
	Cooling Capacity - Full / Half (W)	3500 / 1750	5000/2500	6000/3000
	Power Input - Full / Half (W)	840 / 334	1260/445	1500/555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

Carrier/01-24

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

DURAWHITE EXi

3 Star Inverter Series

Available Variants | 2 TR

6-in-1 FlexiCool Remote

R32

FLEXI COOL
INVERTER TECHNOLOGY

6-IN-1 AC WITH FLEXI COOL
6 modes, up to 50% energy saving.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

PM 2.5 FILTER
Gives cleaner and pure air.

AUTO CLEANSER
Disinfects and cleans the indoor unit.

INTELLIGENT CRF ALERT
Notifies you to clean filters.

FOLLOW ME
Quicker and targeted cooling around remote.

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.

HIGH AMBIENT WORKING
Works in high temperature up to 52°C.

- LED 7 Segment Display
- Air Directional Control
- Auto On/Off Timer
- High Air Flow CFM – 700*
- Auto Swing
- Stabilizer Free Even At 48 Degrees*
- Double Drain
- Backlit Remote

CAI24DH3R32F0

	TONNAGE CATEGORY	2 TR
Performance	Cooling Capacity Max (W)	6900
	Cooling Capacity - Full / Half (W)	6300/3150
	Power Input - Full / Half (W)	2000/765
	Annual Power Consumption (kWh)	1249.82
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.9
	Valve Size (Inch)	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

Carrier/01-24

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

DURAWHITE PRO+ EXi

3 Star Inverter Series

Available Variants | 1 TR & 1.5 TR

6-in-1 FlexiCool Remote

R32

FLEXI COOL
INVERTER TECHNOLOGY

6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY

6 modes, up to 50% energy saving.



REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.

FOLLOW ME

Quicker and targeted cooling around remote.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

- Hidden Display
- Air Directional Control
- Auto On/Off Timer
- High Air Flow CFM – 700*
- Auto Swing
- Stabilizer Free Even At 48 Degrees*
- Double Drain
- Backlit Remote

		CAI12DR3R33F0	CAI18DR3R34F0
	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5350
	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.88	3.85
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

Carrier/01-24

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

Carrier

FIXED SPEED

ACs

XTREME EDGE EX

3 Star Fixed Speed

Available Variant | 1 TR & 1.5 TR

R32

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

HD FILTER

Gives cleaner and pure air.

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

High Air Flow CFM – 450*

Hydro Corrosion Coating (Blue)

Air Directional Control

Auto Restart

Auto Swing

Hidden Display

Auto On/Off Timer

Dry Mode

		CAS12XE3R33F0	CAS18XE3R33F0
	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5350
	Power Input (W)	940	1395
	Annual Power Consumption (kWh)	727.66	1079.88
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.83	3.84
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4

*T&C Apply. 715 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

Carrier/01-24

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

DURAWHITE PRO+ EX

3 Star Fixed Speed

Available Variants | 1 TR & 1.5 TR

R32

PM 2.5 FILTER

Gives cleaner and pure air.

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

- Hidden Display
- Air Directional Control
- Dry Mode
- High Air Flow CFM – 450*
- Auto Swing
- Auto On/Off Timer
- Double Drain
- Turbo Mode

		CAS12DP3R32F1	CAS18DP3R32F0
	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5200
	Power Input (W)	940	1350
	Annual Power Consumption (kWh)	727.66	1045.04
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.83	3.85
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4

*T&C Apply. 700 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.

Carrier/01-24

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

DURAWHITE EX

3 Star Fixed Speed

Available Variants | 2 TR

R32

REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.



HD FILTER

Smart system detects and safeguards the AC.

FOLLOW ME

Quicker and targeted cooling around remote.

AUTO CLEANSER

Disinfects and cleans the indoor unit.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

- Double Drain
- Air Directional Control
- Auto On/Off Timer
- High Air Flow CFM – 450*
- Auto Swing
- Backlit Remote

CAS24DH3R33F0

	TONNAGE CATEGORY	2 TR
Performance	Cooling Capacity - Full / Half (W)	6050
	Power Input - Full / Half (W)	1570
	Annual Power Consumption (kWh)	1215.35
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.85
	Valve Size (Inch)	5/8 x 1/4

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

Carrier

WINDOW
ACs

ESTRELLA EXI

3 & 5 Star Inverter Series

Available Variants | 1.5 TR

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.



DUST FILTER

High-efficient cooling and assured durability.

TURBO MODE

Brings down the temperature rapidly.

ENERGY SAVER MODE

Right temperature at low power bill.

AIR DIRECTIONAL CONTROL

Protects fin against corrosion and increases durability.

Dry Mode

Auto Swing

Auto Restart

Sleep Mode

Auto On/Off Timer

		CIW18EC3R34F0	CIW18EC5R32F0
	TONNAGE CATEGORY	1.5 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5000/2500	5150/2575
	Power Input - Full / Half (W)	1760/800	1640/730
	Annual Power Consumption (kWh)	1210.35	1114.62
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.2	3.58

Carrier/01-24

*T&C Apply. 480 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

ESTRELLA EXi (E)

5 Star Inverter Series

Available Variants | 1.5 TR

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

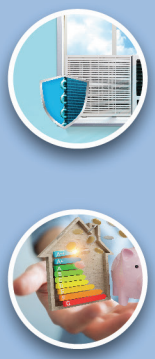

HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.

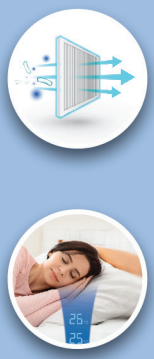

DUST FILTER

High-efficient cooling and assured durability.

TURBO MODE

Brings down the temperature rapidly.

ENERGY SAVER MODE

Right temperature at low power bill.

SLEEP MODE

Automatically switches off the unit after 7 hours.

Air Directional Control

Stabilizer Free Even At 48 Degrees*

Auto Restart

Auto Swing

CIW18EC5R33F1

	TONNAGE CATEGORY	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5070/2535
	Power Input (W)	1620 / 725
	Annual Power Consumption (kWh)	1104.37
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.55

Carrier/01-24

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

ESTRELLA EX

3 Star Fixed Speed

Available Variants | 1 TR



AIR DIRECTIONAL CONTROL

Protects fin against corrosion and increases durability.

HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.



DUST FILTER

High-efficient cooling and assured durability.

TURBO MODE

Brings down the temperature rapidly.

ENERGY SAVER MODE

Right temperature at low power bill.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

Dry Mode

Auto Swing

Auto Restart

Sleep Mode

Auto On/Off Timer

CAW12EC3R34F0

	TONNAGE CATEGORY	1 TR
Performance	Cooling Capacity (W)	3300
	Power Input (W)	1050
	Annual Power Consumption (kWh)	812.81
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.14

Carrier/01-24

*T&C Apply. 300 CFM only applicable on 1 TR model. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

ESTRELLA EX

3 Star Fixed Speed

Available Variants | 1.5 TR & 2 TR

HIGH AMBIENT WORKING

Works in high temperature up to 52°C.

HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.



DUST FILTER

High-efficient cooling and assured durability.

TURBO MODE

Brings down the temperature rapidly.

ENERGY SAVER MODE

Right temperature at low power bill.

AIR DIRECTIONAL CONTROL

Protects fin against corrosion and increases durability.

Dry Mode

Auto Swing

Auto Restart

Sleep Mode

Auto On/Off Timer

		CAW18EC3R32F0	CAW24EC3R32F0
	TONNAGE CATEGORY	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	5000	6000
	Power Input - Full / Half (W)	1558	1875
	Annual Power Consumption (kWh)	1206.06	1451.45
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.21	3.2

Carrier/01-24

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.

www.carriermideaindia.com | www.cmiestore.com Carrier Care: 1800 103 3333

Rest Assured

Specification table for Inverter AC Series.

	PARAMETER	XCEL EDGE EXi	XCEL EDGE EXi	XCEL EDGE EXi	XCEL EDGE Exi (Wi-Fi)	XCEL EDGE Exi (Wi-Fi)	XCEL EDGE Exi (Wi-Fi)
General	MODEL NO.	CAI12CE3R34F0	CAI18CE3R34F0	CAI24CE3R34F0	CAI12CE5R34W0	CAI18CE5R34W0	CAI24CE5R34W0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Maximum Capacity Range (Watts)	4080	5760	6900	4080	5760	6580
	Full Load Capacity (100%) (Watts)	3450	5050	6300	3500	5000	6000
	Half Load Capacity (50%) (Watts)	1725	2525	3150	1750	2500	3000
	Full Load Power Input* (100%) (Watts)	1055	1590	2000	840	1260	1500
	Half Load Power Input* (50%) (Watts)	443	615	765	334	445	555
	Annual Power Consumption (KWH)	694.06	999.69	1249.82	536.2	754.05	920.55
	Label Period	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.85	3.91	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	7.0	8.8	3.8	5.5	6.6
	Net Weight (Kgs(IDU/ODU))	8.4 / 22	10.3 / 25.5	14 / 28	8.4 / 26	10.3 / 27.1	14 / 40
	Air Flow Rate (CFM)	375	580	700	380	580	700
	Indoor Noise Level (H/M/L) (dB)	40/38/32	42/40/37	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	2.4	1.2	2.0	2.4
Overall Size	Indoor Unit (Height) (mm)	275	275	315	275	275	315
	Indoor Unit (Width) (mm)	800	940	1045	800	940	1045
	Indoor Unit (Depth) (mm)	188	205	235	188	205	235
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
Filters	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	YES	YES	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA	NA
	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
Features	Hybridjet Grill	YES	YES	YES	YES	YES	YES
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES	YES	YES
	Security Lock	YES	YES	YES	YES	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	YES	YES	YES	YES	YES	YES
	Auto Off Timer	YES	YES	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES	YES	YES
	Sleep Mode	YES	YES	YES	YES	YES	YES
	Refrigerant Leakage Detector	YES	YES	YES	YES	YES	YES
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	YES	YES	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES	YES	YES
	Intelligent CRF Alert	YES	YES	YES	YES	YES	YES
	Auto Swing	YES	YES	YES	YES	YES	YES
	Auto Cleanser	YES	YES	YES	YES	YES	YES
	Follow Me	YES	YES	YES	YES	YES	YES
	Auto Mode	YES	YES	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES	YES	YES
	Flexicool (6 In 1)	YES	YES	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES	YES	YES
	Wi-Fi (Optional)	NA	NA	NA	YES	YES	YES
	Google Action (Optional)	NA	NA	NA	YES	YES	YES
	Amazon Alexa (Optional)	NA	NA	NA	YES	YES	YES
	Refrigerant Cooling PCB	NA	NA	YES	NA	NA	YES
	My Mode (Favourite Mode)	YES	YES	YES	YES	YES	YES
	Temp Display On/Off	YES	YES	YES	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES	YES	YES
	High Ambient Working	55°C	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V-280V	YES	YES	YES	YES	YES	YES
	KW Display/SED	YES	YES	YES	YES	YES	YES
	X-LED (Xtreme)	NA	NA	NA	NA	NA	NA
	New X-LED VBL (Xcel)	NA	NA	NA	NA	NA	NA

Specification table for Inverter AC Series.

	PARAMETER	XCEL LUMO EXi	XCEL LUMO EXi	XCEL LUMO EXi	XCEL LUMO Exi (Wi-fi)	XCEL LUMO Exi (Wi-fi)	XCEL LUMO Exi (Wi-fi)
General	MODEL NO.	CAI12CL3R34F0	CAI18CL3R34F0	CAI24CL3R34F0	CAI12CL5R34W0	CAI18CL5R34W0	CAI24CL5R34W0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Maximum Capacity Range (Watts)	4080	5760	6900	4080	5760	6580
	Full Load Capacity (100%) (Watts)	3450	5050	6300	3500	5000	6000
	Half Load Capacity (50%) (Watts)	1725	2525	3150	1750	2500	3000
	Full Load Power Input* (100%) (Watts)	1055	1590	2000	840	1260	1500
	Half Load Power Input* (50%) (Watts)	443	615	765	334	445	555
	Annual Power Consumption (KWH)	694.06	999.69	1249.82	536.2	754.05	920.55
	Label Period	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.85	3.91	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	7.0	8.8	3.8	5.5	6.6
	Net Weight (Kgs(IDU/ODU))	8.4 / 22	10.3 / 25.5	14 / 28	8.4 / 26	10.3 / 27.1	14 / 40
	Air Flow Rate (CFM)	375	580	700	380	580	700
	Indoor Noise Level (H/M/L) (dB)	40/38/32	42/40/37	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	2.4	1.2	2.0	2.4
Overall Size	Indoor Unit (Height) (mm)	275	275	315	275	275	315
	Indoor Unit (Width) (mm)	800	940	1045	800	940	1045
	Indoor Unit (Depth) (mm)	188	205	235	188	205	235
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
Filters	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	YES	YES	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA	NA
	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
Features	Hybridjet Grill	YES	YES	YES	YES	YES	YES
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES	YES	YES
	Security Lock	YES	YES	YES	YES	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	YES	YES	YES	YES	YES	YES
	Auto Off Timer	YES	YES	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES	YES	YES
	Sleep Mode	YES	YES	YES	YES	YES	YES
	Refrigerant Leakage Detector	YES	YES	YES	YES	YES	YES
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	YES	YES	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES	YES	YES
	Intelligent CRF Alert	YES	YES	YES	YES	YES	YES
	Auto Swing	YES	YES	YES	YES	YES	YES
	Auto Cleanser	YES	YES	YES	YES	YES	YES
	Follow Me	YES	YES	YES	YES	YES	YES
	Auto Mode	YES	YES	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES	YES	YES
	Flexicool (6 In 1)	YES	YES	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES	YES	YES
	Wi-Fi (Optional)	NA	NA	NA	YES	YES	YES
	Google Action (Optional)	NA	NA	NA	YES	YES	YES
	Amazon Alexa (Optional)	NA	NA	NA	YES	YES	YES
	Refrigerant Cooling PCB	NA	NA	YES	NA	NA	YES
	My Mode (Favourite Mode)	YES	YES	YES	YES	YES	YES
	Temp Display On/Off	YES	YES	YES	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES	YES	YES
	High Ambient Working	55°C	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V-280V	YES	YES	YES	YES	YES	YES
	KW Display/SED	YES	YES	YES	YES	YES	YES
	X-LED (Xtreme)	NA	NA	NA	NA	NA	NA
	New X-LED VBL (Xcel)	YES	YES	YES	YES	YES	YES

Specification table for Inverter AC Series.

	PARAMETER	XTREME EDGE EXi	XTREME EDGE EXi	XTREME EDGE EXi	XTREME EDGE EXi	XTREME EDGE EXi
General	MODEL NO.	CAI12XE3R34F0	CAI18XE3R34F0	CAI24XE3R34F0	CAI12XE5R33F0	CAI18XE5R34F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5
	Maximum Capacity Range (Watts)	4080	5760	6900	4080	5910
	Full Load Capacity (100%) (Watts)	3450	5150	6300	3450	5200
	Half Load Capacity (50%) (Watts)	1725	2575	3150	1725	2600
	Full Load Power Input* (100%) (Watts)	1065	1610	2000	850	1290
	Half Load Power Input* (50%) (Watts)	430	650	765	323	475
	Annual Power Consumption (KWH)	685.59	1036.39	1249.82	529.28	789.6
	Label Period	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star
	ISEER Value (W/W)	3.9	3.85	3.9	5.05	5.1
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	8.8	3.7	5.7
	Net Weight (Kgs(IDU/ODU))	9.3/ 22	11 / 25.5	14 / 28	9.3 / 26	11.3 / 27.1
	Air Flow Rate (CFM)	430	715	715	430	695
	Indoor Noise Level (H/M/L) (dB)	40/38/32	42/40/38	46/44/39	40/38/32	42/40/38
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	2.4	1.2	2.0
Overall Size	Indoor Unit (Height) (mm)	295	295	295	295	295
	Indoor Unit (Width) (mm)	804	1000	1000	804	1000
	Indoor Unit (Depth) (mm)	200	230	230	200	230
	Outdoor Unit (Height) (mm)	540	540	540	540	540
	Outdoor Unit (Width) (mm)	780	790	790	790	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280
Filters	HD Filter	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	NA	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	YES	NA	NA
	Cold Catalyst Filter	NA	NA	NA	NA	NA
Features	Hybridjet Grill	YES	YES	YES	YES	YES
	Refrigerant	R32	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES	YES
	Security Lock	YES	YES	YES	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	YES	YES	YES	YES	YES
	Auto Off Timer	YES	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES	YES
	Sleep Mode	YES	YES	YES	YES	YES
	Refrigerant Leakage Detector	YES	YES	YES	YES	YES
	Louver Position Memory	NA	NA	NA	NA	NA
	Dry Mode	YES	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES	YES
	Intelligent CRF Alert	YES	YES	YES	YES	YES
	Auto Swing	YES	YES	YES	YES	YES
	Auto Cleanser	YES	YES	YES	YES	YES
	Follow Me	YES	YES	YES	YES	YES
	Auto Mode	YES	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES	YES
	Flexicool (6 In 1)	YES	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES	YES
	Wi-Fi (Optional)	NA	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA	NA
	Refrigerant Cooling PCB	NA	NA	YES	NA	NA
	My Mode (Favourite Mode)	YES	YES	YES	YES	YES
	Temp Display On/Off	YES	YES	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES	YES
	High Ambient Working	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V-280V	YES	YES	YES	YES	YES
	KW Display/SED	NA	NA	NA	NA	NA
	X-LED (Xtreme)	NA	NA	NA	NA	NA
	New X-LED VBL (Xcel)	NA	NA	NA	NA	NA

Specification table for Inverter AC Series.

	PARAMETER	XTREME LUMO EXi	XTREME LUMO EXi	XTREME LUMO EXi	XTREME LUMO EXi	XTREME LUMO EXi
General	MODEL NO.	CAI12XL3R34F0	CAI18XL3R34F0	CAI24XL3R34F0	CAI12XL5R33F0	CAI18XL5R34F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5
	Maximum Capacity Range (Watts)	4080	5760	6900	4080	5910
	Full Load Capacity (100%) (Watts)	3450	5150	6300	3450	5200
	Half Load Capacity (50%) (Watts)	1725	2575	3150	1725	2600
	Full Load Power Input* (100%) (Watts)	1065	1610	2000	850	1290
	Half Load Power Input* (50%) (Watts)	430	650	765	323	475
	Annual Power Consumption (KWH)	685.59	1036.39	1249.82	529.28	789.6
	Label Period	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star
	ISEER Value (W/W)	3.9	3.85	3.9	5.05	5.1
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	8.8	3.7	5.7
	Net Weight (Kgs(IDU/ODU))	9.3/ 22	11 / 25.5	14 / 28	9.3 / 26	11.3 / 27.1
	Air Flow Rate (CFM)	430	715	715	430	695
	Indoor Noise Level (H/M/L) (dB)	40/38/32	42/40/38	46/44/39	40/38/32	42/40/38
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	2.4	1.2	2.0
Overall Size	Indoor Unit (Height) (mm)	295	295	295	295	295
	Indoor Unit (Width) (mm)	804	1000	1000	804	1000
	Indoor Unit (Depth) (mm)	200	230	230	200	230
	Outdoor Unit (Height) (mm)	540	540	540	540	540
	Outdoor Unit (Width) (mm)	780	790	790	790	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280
Filters	HD Filter	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	NA	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	YES	NA	NA
	Cold Catalyst Filter	NA	NA	NA	NA	NA
Features	Hybridjet Grill	YES	YES	YES	YES	YES
	Refrigerant	R32	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES	YES
	Security Lock	YES	YES	YES	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	YES	YES	YES	YES	YES
	Auto Off Timer	YES	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES	YES
	Sleep Mode	YES	YES	YES	YES	YES
	Refrigerant Leakage Detector	YES	YES	YES	YES	YES
	Louver Position Memory	NA	NA	NA	NA	NA
	Dry Mode	YES	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES	YES
	Intelligent CRF Alert	YES	YES	YES	YES	YES
	Auto Swing	YES	YES	YES	YES	YES
	Auto Cleanser	YES	YES	YES	YES	YES
	Follow Me	YES	YES	YES	YES	YES
	Auto Mode	YES	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES	YES
	Flexicool (6 In 1)	YES	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES	YES
	Wi-Fi (Optional)	NA	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA	NA
	Refrigerant Cooling PCB	NA	NA	YES	NA	NA
	My Mode (Favourite Mode)	YES	YES	YES	YES	YES
	Temp Display On/Off	YES	YES	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES	YES
	High Ambient Working	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V-280V	YES	YES	YES	YES	YES
	KW Display/SED	NA	NA	NA	NA	NA
	X-LED (Xtreme)	YES	YES	YES	YES	YES
	New X-LED VBL (Xcel)	NA	NA	NA	NA	NA

Specification table for Inverter AC Series.

	PARAMETER	INDUS EXi	INDUS EXi	INDUS EXi	INDUS Exi SMART	INDUS Exi SMART	INDUS Exi SMART
General	MODEL NO.	CAI12IN3R34F0	CAI18IN3R34F0	CAI24IN3R32F0	CAI12IN5R34W0	CAI18IN5R34W0	CAI24IN5R34W0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Maximum Capacity Range (Watts)	4080	5760	6900	4080	5910	6580
	Full Load Capacity (100%) (Watts)	3450	5050	6300	3500	5230	6000
	Half Load Capacity (50%) (Watts)	1725	2525	3150	1750	2615	3000
	Full Load Power Input* (100%) (Watts)	1055	1590	2000	840	1290	1500
	Half Load Power Input* (50%) (Watts)	443	615	765	334	475	555
	Annual Power Consumption (KWH)	694.06	999.69	1249.82	536.2	789.6	920.55
	Label Period	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.85	3.91	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	7.0	8.8	3.8	5.8	6.6
	Net Weight (Kgs(IDU/ODU))	8.4 / 22	10.3 / 25.5	14 / 28	8.4 / 26	12.2 / 27.1	14 / 40
	Air Flow Rate (CFM)	400	580	700	380	685	700
	Indoor Noise Level (H/M/L) (dB)	40/38/32	42/40/37	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	2.4	1.2	2.0	2.4
Overall Size	Indoor Unit (Height) (mm)	282	275	320	275	324	320
	Indoor Unit (Width) (mm)	798	940	1046	800	965	1046
	Indoor Unit (Depth) (mm)	192	205	240	188	234	240
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
Filters	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	NA	NA	NA	NA	NA	NA
	AG+ Nano Filter	NA	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	YES	YES	YES	YES	YES	YES
	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
Features	Hybridjet Grill	YES	YES	YES	YES	YES	YES
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES	YES	YES
	Security Lock	YES	YES	YES	YES	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	YES	YES	YES	YES	YES	YES
	Auto Off Timer	YES	YES	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES	YES	YES
	Sleep Mode	YES	YES	YES	YES	YES	YES
	Refrigerant Leakage Detector	YES	YES	YES	YES	YES	YES
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	YES	YES	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES	YES	YES
	Intelligent CRF Alert	YES	YES	YES	YES	YES	YES
	Auto Swing	YES	YES	YES	YES	YES	YES
	Auto Cleanser	YES	YES	YES	YES	YES	YES
	Follow Me	YES	YES	YES	YES	YES	YES
	Auto Mode	YES	YES	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES	YES	YES
	Flexicool (6 In 1)	YES	YES	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES	YES	YES
	Wi-Fi (Optional)	NA	NA	NA	YES	YES	YES
	Google Action (Optional)	NA	NA	NA	YES	YES	YES
	Amazon Alexa (Optional)	NA	NA	NA	YES	YES	YES
	Refrigerant Cooling PCB	NA	NA	YES	NA	YES	YES
	My Mode (Favourite Mode)	YES	YES	YES	YES	YES	YES
	Temp Display On/Off	YES	YES	YES	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES	YES	YES
	High Ambient Working	55°C	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V-280V	YES	YES	YES	YES	YES	YES
	KW Display/SED	YES	YES	YES	YES	YES	YES
	X-LED (Xtreme)	NA	NA	NA	NA	NA	NA
	New X-LED VBL (Xcel)	NA	NA	NA	NA	NA	NA

Specification table for Inverter AC Series.

	PARAMETER	DURAWHITE PRO+ Exi	DURAWHITE PRO+ Exi	DURAWHITE Exi	DURAWHITE Exi	DURAWHITE Exi	DURAWHITE Exi
General	MODEL NO.	CAI12DR3R33F0	CAI18DR3R34F0	CAI24DH3R32F0	CAI12DH5R34F0	CAI18DH5R34F0	CAI24DH5R34F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Maximum Capacity Range (Watts)	4080	5350	6900	4080	5760	6580
	Full Load Capacity (100%) (Watts)	3530	4800	6300	3500	5000	6000
	Half Load Capacity (50%) (Watts)	1765	2400	3150	1750	2500	3000
	Full Load Power Input* (100%) (Watts)	1055	1575	2000	840	1260	1500
	Half Load Power Input* (50%) (Watts)	455	580	765	334	445	555
	Annual Power Consumption (KWH)	704.46	964.1	1249.82	536.2	754.05	920.55
	Label Period	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.88	3.85	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	8.8	3.8	5.5	6.6
	Net Weight (Kgs(IDU/ODU))	9.5 / 22	10 / 25.5	14 / 28	8.4 / 26	10.3 / 27.1	14 / 40
	Air Flow Rate (CFM)	400	450	700	380	580	700
	Indoor Noise Level (H/M/L) (dB)	40/38/32	40/38/32	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	2.4	1.2	2.0	2.4
Overall Size	Indoor Unit (Height) (mm)	270	270	315	275	275	315
	Indoor Unit (Width) (mm)	850	850	1045	800	940	1045
	Indoor Unit (Depth) (mm)	220	220	235	188	205	235
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
Filters	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	NA	YES	YES	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA	NA
	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
Features	Hybridjet Grill	NA	NA	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES	YES	YES
	Security Lock	YES	YES	YES	YES	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display	LED Display	LED Display	LED Display	LED Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	YES	YES	YES	YES	YES	YES
	Auto Off Timer	YES	YES	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES	YES	YES
	Sleep Mode	YES	YES	YES	YES	YES	YES
	Refrigerant Leakage Detector	YES	YES	YES	YES	YES	YES
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	YES	YES	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES	YES	YES
	Intelligent CRF Alert	YES	YES	YES	YES	YES	YES
	Auto Swing	YES	YES	YES	YES	YES	YES
	Auto Cleanser	YES	YES	YES	YES	YES	YES
	Follow Me	YES	YES	YES	YES	YES	YES
	Auto Mode	YES	YES	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES	YES	YES
	Flexicool (6 In 1)	YES	YES	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES	YES	YES
	Wi-Fi (Optional)	NA	NA	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA	NA	NA
	Refrigerant Cooling PCB	NA	NA	YES	NA	NA	YES
	My Mode (Favourite Mode)	YES	YES	YES	YES	YES	YES
	Temp Display On/Off	YES	YES	YES	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES	YES	YES
	High Ambient Working	52°C	52°C	52°C	52°C	52°C	52°C
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V-280V	YES	YES	YES	YES	YES	YES
	KW Display/SED	NA	NA	NA	NA	NA	NA
	X-LED (Xtreme)	NA	NA	NA	NA	NA	NA
	New X-LED VBL (Xcel)	NA	NA	NA	NA	NA	NA

Specification table for Inverter AC Series.

	PARAMETER	OCTRA Exi	OCTRA Exi	KURVE Exi	KURVE Exi
General	MODEL NO.	CAI12OC3R34F0	CAI18OC3R34F0	CAI12KU3R34F0	CAI18KU3R34F0
	Tonnage Category (TR)	1.0	1.5	1.0	1.5
	Maximum Capacity Range (Watts)	4080	5350	4080	5350
	Full Load Capacity (100%) (Watts)	3530	4800	3530	4800
	Half Load Capacity (50%) (Watts)	1765	2400	1765	2400
	Full Load Power Input* (100%) (Watts)	1055	1575	1055	1575
	Half Load Power Input* (50%) (Watts)	455	580	455	580
	Annual Power Consumption (KWH)	704.46	964.1	704.46	964.1
	Label Period	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	3 Star
	ISEER Value (W/W)	3.88	3.85	3.88	3.85
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	4.6	6.9
	Net Weight (Kgs(IDU/ODU))	9.5/ 22	10 / 25.5	9.5 / 22	10 / 25.5
	Air Flow Rate (CFM)	400	450	400	450
	Indoor Noise Level (H/M/L) (dB)	40/38/32	40/38/32	40/38/32	40/38/32
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	1.2	2.0
Overall Size	Indoor Unit (Height) (mm)	270	270	270	270
	Indoor Unit (Width) (mm)	850	850	850	850
	Indoor Unit (Depth) (mm)	220	220	220	220
	Outdoor Unit (Height) (mm)	540	540	540	540
	Outdoor Unit (Width) (mm)	780	790	780	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	265	280
Filters	HD Filter	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	NA	YES	NA
	AG+ Nano Filter	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA
	Cold Catalyst Filter	NA	NA	NA	NA
Features	Hybridjet Grill	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES
	Security Lock	YES	YES	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	YES	YES	YES	YES
	Auto Off Timer	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES
	Sleep Mode	YES	YES	YES	YES
	Refrigerant Leakage Detector	YES	YES	YES	YES
	Louver Position Memory	NA	NA	NA	NA
	Dry Mode	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES
	Intelligent CRF Alert	YES	YES	YES	YES
	Auto Swing	YES	YES	YES	YES
	Auto Cleanser	YES	YES	YES	YES
	Follow Me	YES	YES	YES	YES
	Auto Mode	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES
	Flexicool (6 In 1)	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES
	Wi-Fi (Optional)	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA
	Refrigerant Cooling PCB	NA	NA	NA	NA
	My Mode (Favourite Mode)	YES	YES	YES	YES
	Temp Display On/Off	YES	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES
	High Ambient Working	52°C	52°C	52°C	52°C
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V-280V	YES	YES	YES	YES
	KW Display/SED	NA	NA	NA	NA
	X-LED (Xtreme)	NA	NA	NA	NA
	New X-LED VBL (Xcel)	NA	NA	NA	NA

Specification table for Hot & Cold Inverter AC Series.

	PARAMETER	NOVELLO H&C	INDUS H&C
General	Model No.	CAI18NO3R32H0	CAI18IN3R33H0
	Tonnage Category (TR)	1.5	1.5
	Maximum Capacity (Watts)	5910	5760
	Cooling Capacity (Full Load/half) (Watts)	5300 / 2650	5100 / 2550
	Heating Capacity (Full Load) (Watts)	5300 / 2650	5000
	Cooling Power Input (Full/half) (Watts)	1583 / 580	1540 / 618
	Heating Power Input (Full Load) (Watts)	1583 / 580	1540
	Annual Power Consumption cooling Only (KWH)	966.34	988.04
	Label Period	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024
	BEE Star Rating***	3 Star	3 Star
	ISEER Value (W/W)	4.25	4
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	6.8	6.8
	Net Weight (Kgs(IDU/ODU))	11 / 36.5	12.2 / 26.5
	Air Flow Rate (CFM)	630	685
	Indoor Noise Level (H/M/L) (dB)	49/46/43	49/46/43
	Fan Motor (Indoor) (No.of Speeds)	4	4
	With Connecting Kit Pipe	YES	YES
	Valve Size (Inch)	1/2" x 1/4"	1/2" x 1/4"
	Moisture Removal Rate (Kg/hr)	2.0	2.0
Overall Size	Indoor Unit (Height) (mm)	295	324
	Indoor Unit (Width) (mm)	1000	965
	Indoor Unit (Depth) (mm)	230	234
	Outdoor Unit (Height) (mm)	594	540
	Outdoor Unit (Width) (mm)	810	790
	Outdoor Unit (Depth-with Grill) (mm)	300	280
Filters	HD Filter	YES	YES
	PM 2.5 Micron Filter(3M Brand)	NA	NA
	PM 2.5 Micron Filter	NA	NA
	AG+ Nano Filter	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	YES
Features	Hybridjet Grill	NA	YES
	Refrigerant	R32	R32
	Air Direction Control	YES	YES
	Security Lock	YES	YES
	IDU Temp Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote
	Remote Backlit	NA	YES
	Auto Off Timer	YES	YES
	Auto On Timer	YES	YES
	Sleep Mode	YES	YES
	Refrigerant Leakage Detector	NA	YES
	Louver Position Memory	YES	NA
	Dry Mode	YES	YES
	Auto Fan Speed	YES	YES
	Intelligent CRF Alert	NA	YES
	Auto Swing	YES	YES
	Auto Cleanser	NA	YES
	Follow Me	NA	YES
	Auto Mode	YES	YES
	Auto Restart	YES	YES
	Double Drain (Easy Installation)	YES	YES
	Flexicool (6 In 1)	NA	YES
	Insta Cool	NA	YES
	Wi-Fi (Optional)	NA	NA
	Google Action (Optional)	NA	NA
	Amazon Alexa (Optional)	NA	NA
	Refrigerant Cooling PCB	NA	NA
	My Mode (Favourite Mode)	NA	YES
	Temp Display On/Off	YES	YES
	Clock	YES	NA
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES
	High Ambient Working	52 deg	55 deg
	Stabilizer Free Operation (Even @48°C Range for stabiliser is 135V~280V	YES	YES
	Operating Range	(-)10 deg / 52 Deg	0 deg / 55 Deg
	KW Display/SED	NA	YES

Specification table for Fixed Speed AC Series.

	PARAMETER	Durawhite Pro+ Ex	Durawhite Pro+ Ex	Durawhite Ex	Xtreme Edge Ex	Xtreme Edge Ex
General	Model No.	CAS12DP3R32F1	CAS18DP3R32F0	CAS24DH3R33F0	CAS12XE3R33F0	CAS18XE3R33F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5
	Rated Capacity* (Watts)	3600	5200	6050	3600	5350
	Nominal Cooling/Heating Power Input* (KWH) (Watts)	940	1350	1570	940	1395
	Annual Power	727.66	1045.04	1215.35	727.66	1079.88
	Label Period	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024	1st July,2022 -31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	3 Star	3 Star
	ISEER Value (W/W)	3.83	3.85	3.85	3.83	3.84
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.1	5.9	6.9	4.1	6.1
	Net Weight (Kgs(IDU/ODU))	10 / 28	12 / 33.5	14 / 43.6	10 / 28	11 / 34
	Air Flow Rate (CFM)	400	700	700	430	715
	Indoor Noise Level (H/M/L) (dB)	39/35/32	44/42/38	46/44/40	40/38/32	39/35/32
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES	YES
	Valve Size (Inch)	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"
Overall Size	Indoor Unit (Height) (mm)	270	320	315	295	295
	Indoor Unit (Width) (mm)	850	950	1045	804	1000
	Indoor Unit (Depth) (mm)	220	240	235	200	230
	Outdoor Unit (Height) (mm)	540	540	700	540	540
	Outdoor Unit (Width) (mm)	780	790	845	780	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	335	265	280
Filters	HD Filter	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter (3M Brand)	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	NA	NA	YES	NA	NA
	Air Cleaner (Composite Air Freshing Mesh)	NA	NA	NA	NA	NA
	AG+ Nano Filter	NA	NA	NA	NA	NA
	Hyper Protective Filter	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA
Features	Hybridjet Grill	NA	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32	R32
	Air Direction Control	YES	YES	YES	YES	YES
	Security Lock	NA	NA	YES	NA	NA
	IDU Temp Display	Hidden Display	Hidden Display	LED Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	NA	NA	YES	NA	NA
	Auto Off Timer	YES	YES	YES	YES	YES
	Auto On Timer	YES	YES	YES	YES	YES
	Economic Sleep Mode	YES	YES	YES	YES	YES
	Refrigerant Leakage Detector	NA	NA	YES	NA	NA
	Louver Position Memory	YES	YES	NA	YES	YES
	Dry Mode	YES	YES	YES	YES	YES
	Auto Fan Speed	YES	YES	YES	YES	YES
	Intelligent CRF Alert	NA	NA	YES	NA	NA
	Auto Swing	YES	YES	YES	YES	YES
	Auto Cleanser (Self Clean)	YES	YES	YES	YES	YES
	Follow Me	NA	NA	YES	NA	NA
	Auto Mode	YES	YES	YES	YES	YES
	Auto Restart	YES	YES	YES	YES	YES
	Double Drain (Easy Installation)	YES	YES	YES	YES	YES
	Manual On/Off Button	YES	YES	YES	YES	YES
	My Mode (Favourite Mode)	NA	NA	YES	NA	NA
	High Ambient Working (At 230V Rated)	52°C	52°C	52°C	52°C	52°C
	IDU Display On/Off	YES	YES	YES	YES	YES
	Summer Chill	YES	YES	NA	NA	NA
	Silent	YES	YES	NA	NA	NA
	4-way Swing	NA	NA	NA	NA	NA
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES	YES	YES

Specification table for Window Inverter AC Series.

	PARAMETER	ESTRELLA EXi	ESTRELLA Exi (E)	ESTRELLA EXi
General	Model No.	CIW18EC5R32F0	CIW18EC5R33F1	CIW18EC3R34F0
	Tonnage Category (TR)	1.5	1.5	1.5
	BEE Star Rating***	5	5	3
	Full Load Capacity	5150	5070	5000
	Half Load Capacity	2575	2535	2500
	Full Load Power Input*	1640	1620	1760
	Half Load Power Input*	730	725	800
	Annual Power Consumption (KWH)	1114.62	1104.37	1210.35
	ISEER Value (W/W)	3.58	3.55	3.2
	Rated Power Supply (Volts/Ph/Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Current (Amp)	7.6	7.1	8
	Air Flow Rate (CFM)	480	450	470
	Noise Level (H/M/L)	56/53/50	56/53/50	56/53/50
Physical Aspects	Overall Height (mm)	430	430	430
	Overall Width (mm)	660	660	660
	Overall Depth (mm)	770	700	700
	Net Weight (Kg)	56	45	46
	Fan Motor (# of speeds)	3	3	3
Filters	Electrostatic Filter	NA	NA	NA
	Zeolite Filter	NA	NA	NA
	Charcoal / Active Carbon Filter	NA	NA	NA
	Vitamin C Filter	NA	NA	NA
	Dust Filter	YES	YES	YES
Features	Air Direction	2 Way	2 Way	2 Way
	Control Type	LCD Remote	LCD Remote	LCD Remote
	Room Temperature Display	YES	YES	YES
	Auto Off Timer	YES	YES	YES
	Auto On Timer	YES	YES	YES
	Sleep Mode	YES	YES	YES
	Dry Mode	YES	YES	YES
	Auto Fan Speed	YES	YES	YES
	Energy Saver Mode	YES	YES	YES
	Exhaust Command	NA	NA	NA
	Smart Time Guard	NA	NA	NA
	Auto Swing	YES	YES	YES
	Auto Restart	YES	YES	YES
	Refrigerant	R32	R32	R32
	Fexicool (50% , 75% , 100% Power)	NA	NA	NA
	Wi-Fi (Optional)	NA	NA	NA
	Google Action(Optional)	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA
	High Ambient Working	52°C	52°C	52°C
	Stabilizer Free Operation (Even @48°C Range for Stabiliser is 135V-280V	YES	YES	YES
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES

Specification table for Window Fixed Speed AC Series.

	PARAMETER	ESTRELLA Ex	ESTRELLA Ex	ESTRELLA Ex
General	Model No.	CAW12EC3R34F0	CAW18EC3R32F0	CAW24EC3R32F0
	Tonnage Category (TR)	1.0	1.5	2.0
	Label Period	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024	1st July,2022 - 31st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star
	Rated Capacity* (Watts)	3300	5000	6000
	Nominal Power Input* (Watts)	1050	1558	1875
	Annual Power Consumption (KWH)	812.81	1206.06	1451.45
	ISEER Value (W/W)	3.14	3.21	3.2
	Rated Power Supply (Volts/Ph/Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Net Weight (Kgs)	42	54	60.5
Physical Aspects	Overall Height (mm)	375	430	430
	Overall Width (mm)	560	660	660
	Overall Depth (mm)	620	700	770
	Air Flow Rate (CFM)	300	500	650
	Noise Level (H/M/L) (dB(A))	52/49/47	56/54/52	60/59/58
	Fan Motor (# of speeds)	3	3	3
Filters	Electrostatic Filter	NA	NA	NA
	Zeolite Filter	NA	NA	NA
	Charcoal / Active Carbon Filter	NA	NA	NA
	Vitamin C Filter	NA	NA	NA
	Dust Filter	YES	YES	YES
Features	Air Direction	2 Way	2 Way	2 Way
	Control Type	Non LCD Remote	Non LCD Remote	Non LCD Remote
	Temperature Display - on Panel	YES	YES	YES
	Auto Off Timer	YES	YES	YES
	Auto On Timer	YES	YES	YES
	Sleep Mode	YES	YES	YES
	Dry Mode	YES	YES	YES
	Auto Fan Speed	YES	YES	YES
	Energy Saver Mode	YES	YES	YES
	Exhaust Command	NA	NA	NA
	Smart Time Guard	NA	NA	NA
	Auto Swing	YES	YES	YES
	Auto Restart	YES	YES	YES
	High Ambient Working (at 230V Rated)	50°C	50°C	50°C
	Refrigerant	R32	R32	R32
	Anti Corrosion Coating (Blue) Evaporator HP Side	YES	YES	YES

Carrier

REASONS TO BUY
CARRIER ROOM AIR CONDITIONERS

JUST ASK alexa | works with Google Assistant | 6-IN-1 AC WITH FLEXI COOL INVERTER TECHNOLOGY | INDIA'S FIRST X-LINE LED DESIGN | HYBRID JET

- Smart Energy Display
- Anti-Viral Guard*
- Carrier Smart Connect
- Insta Kool
- High Ambient Working (At 55° C)
- Hidden Display
- Auto Swing
- Intelligent CRF Alert
- Refrigerant Leakage Detector
- Stabilizer Free Even At 48 Deg*
- Hydro Blue Coating*
- Aqua Clear Protection
- Auto Cleanser
- 34 Feet Air Flow*
- Air Directional Control
- Follow Me
- My Mode
- 100% Copper
- Equipped With 5 Safety Sensors
- Error Code Indicator

INDIA DESIGN MARK awarded in 2021 | R32 | WARRANTY 10 YEARS COMPRESSOR WARRANTY

*Terms and Conditions apply. Product specifications, features, and offers are subject to change without prior notice.
For detailed terms and conditions & validity period, please visit www.carriermideaindia.com
Xtreme Lumo Registration Code 382679-001 | Xcel Lumo Registration Code 398592-001.

Rest Assured

Images shown are for reference only, actual product may vary.
For private circulation only. This is not an advertisement.

Corporate Office:
CARRIER MIDEA INDIA PRIVATE LIMITED
1st Floor, Pearl Tower, Plot No - 51, Sector - 32, Gurgaon, Haryana - 122001

Factory:
CARRIER MIDEA INDIA
Plot No. A-5, SUPA-PARNER Industrial Area, Ahmednagar, Maharashtra, 414301

CARRIER CARE - 1800 103 3333

https://www.facebook.com/CarrierMideaAc https://www.instagram.com/carriermideaindia

https://www.twitter.com/CarrierMideaInd

Disclaimer: As a continuing policy of product innovation at Carrier, the design and specifications are subject to change without prior notice.
The visuals of the products in the brochure are representative only, actual products might differ from the ones shown.
'Products mentioned in this brochure comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of their useful life'. For more details kindly visit our website: www.carriermideaindia.com or contact Carrier care: 1800 103 3333